


/ Descriptions



/ Features

/ Applications

/ Equivalent Circuit

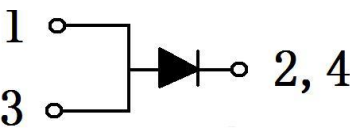

/ Pinning

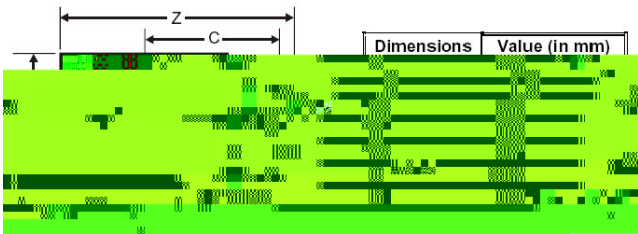




/ h_{FE} Classifications & Marking

/ Absolute Maximum Ratings(Ta=25)


	θ		

/ Electrical Characteristics(Ta=25)


/ Electrical Characteristic Curve

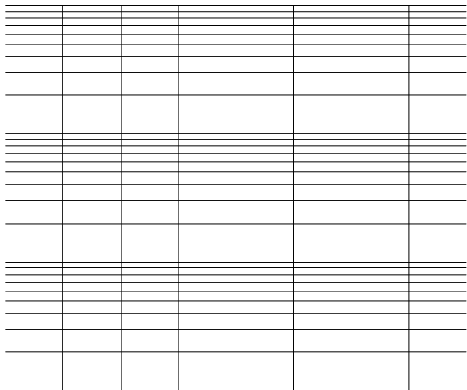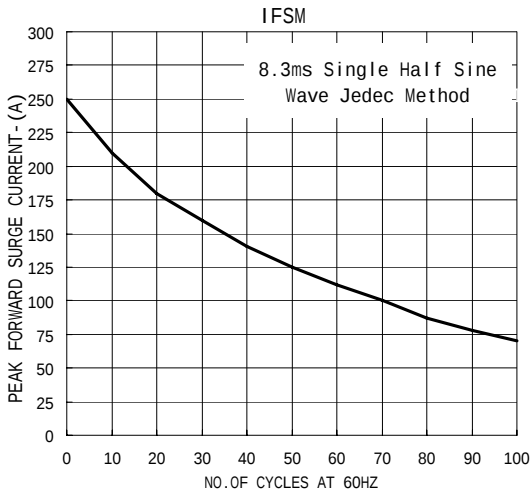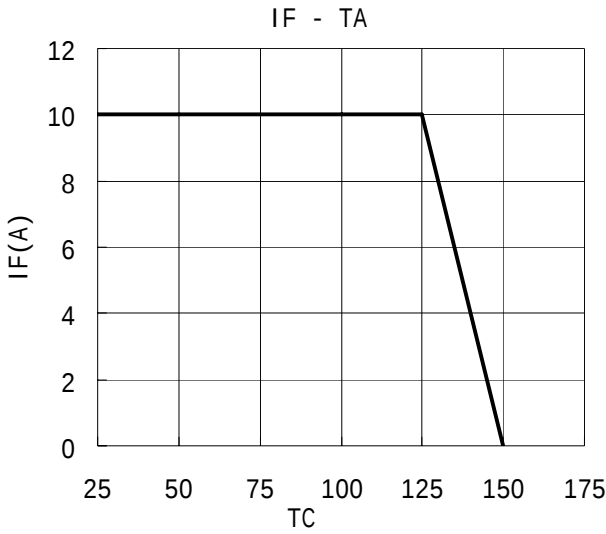

/ Package Dimensions

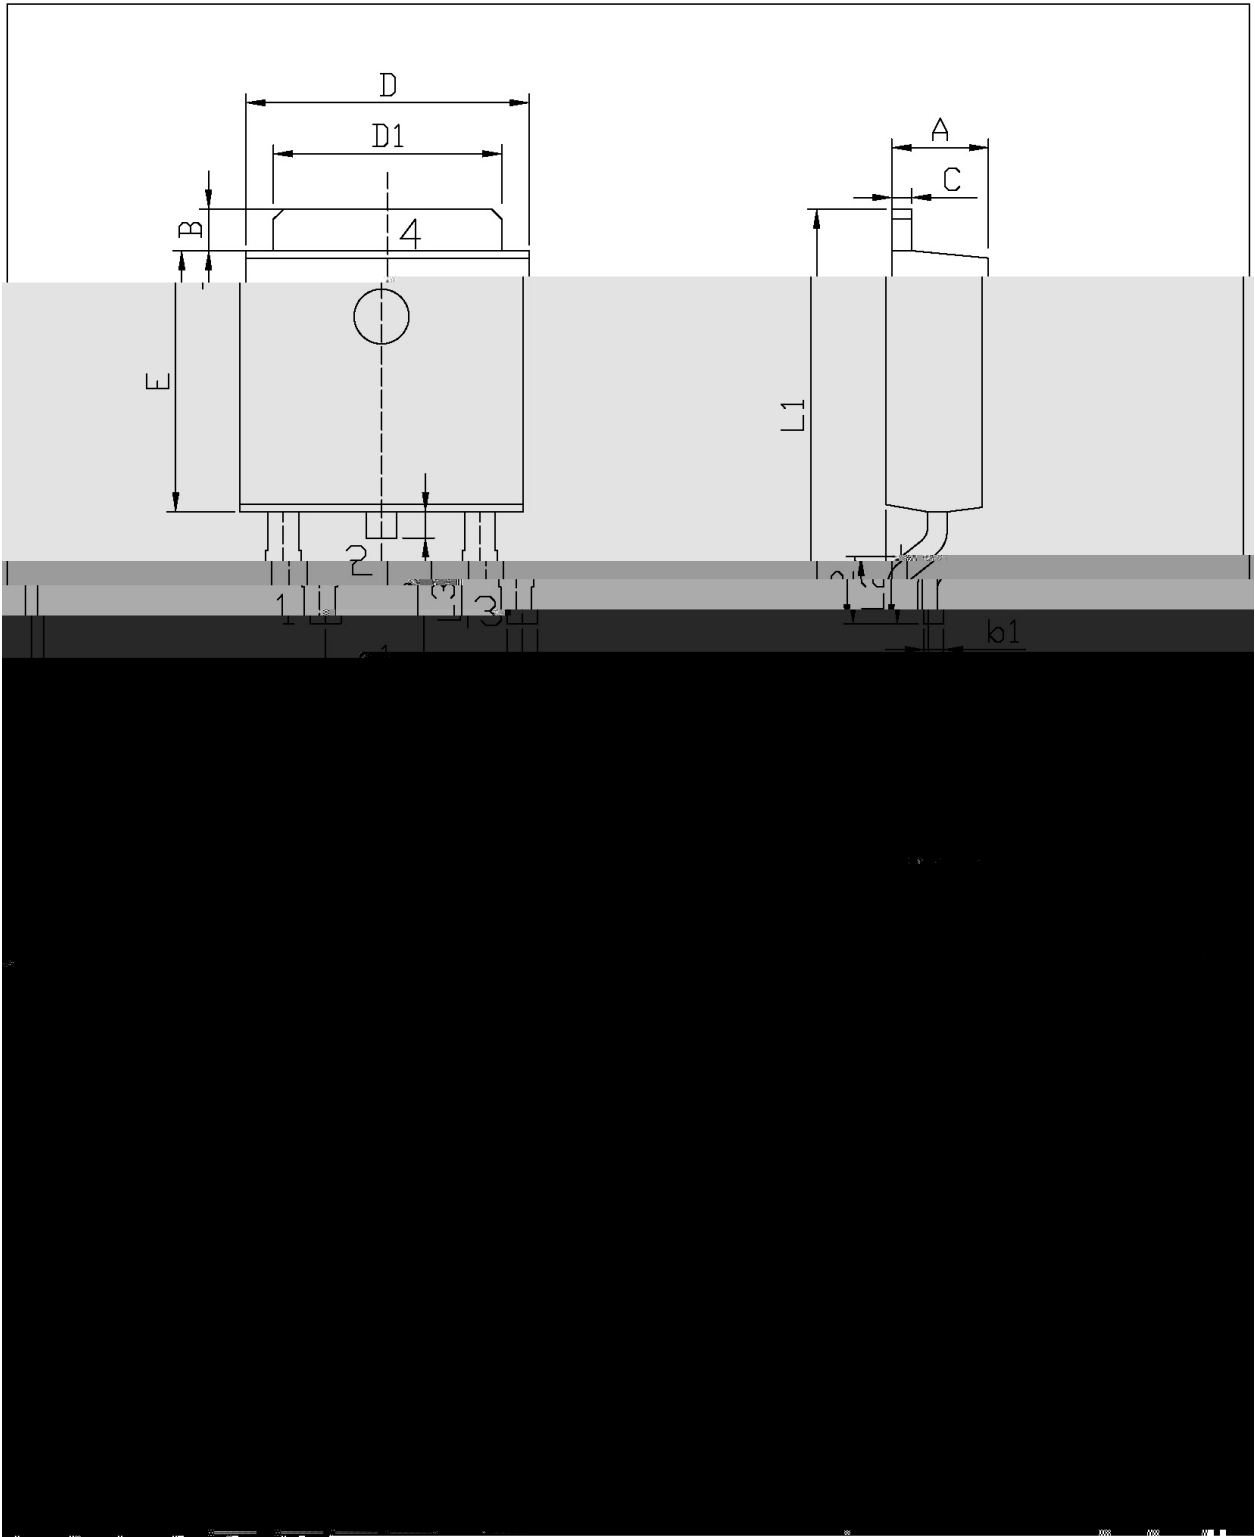

/ Marking Instructions

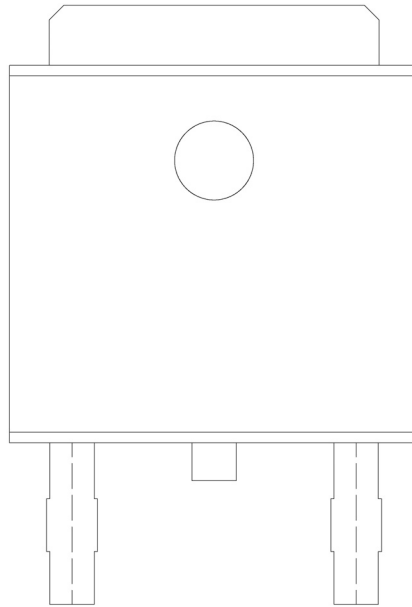

LV10S45D

() / Temperature Profile for IR Reflow Soldering(Pb-Free)