


TO-92 NPN Silicon NPN transistor in a TO-92 Plastic Package.

High I_C , high h_{FE}

Use in general-purpose Speech Synthesizer(Voice Rom) I_C audio output driver stage amplifier applications.




PIN1 Base PIN 2 Collector PIN 3 Emitter

h_{FE} Classifications Symbol	B	C	D
h_{FE} Range	300~550	500~700	650~1000


Parameter	Symbol	Rating	Unit
Collector to Base Voltage	V_{CBO}	40	V
Collector to Emitter Voltage	V_{CEO}	20	V
Emitter to Base Voltage	V_{EBO}	6.0	V
Collector Current - Continuous	I_C	1.0	A
Collector Power Dissipation	P_C	625	mW
Junction Temperature	T_J	150	
Storage Temperature Range	T_{stg}	-55 150	


Parameter	Symbol	Test Conditions	Min	Typ	Max
-----------	--------	-----------------	-----	-----	-----

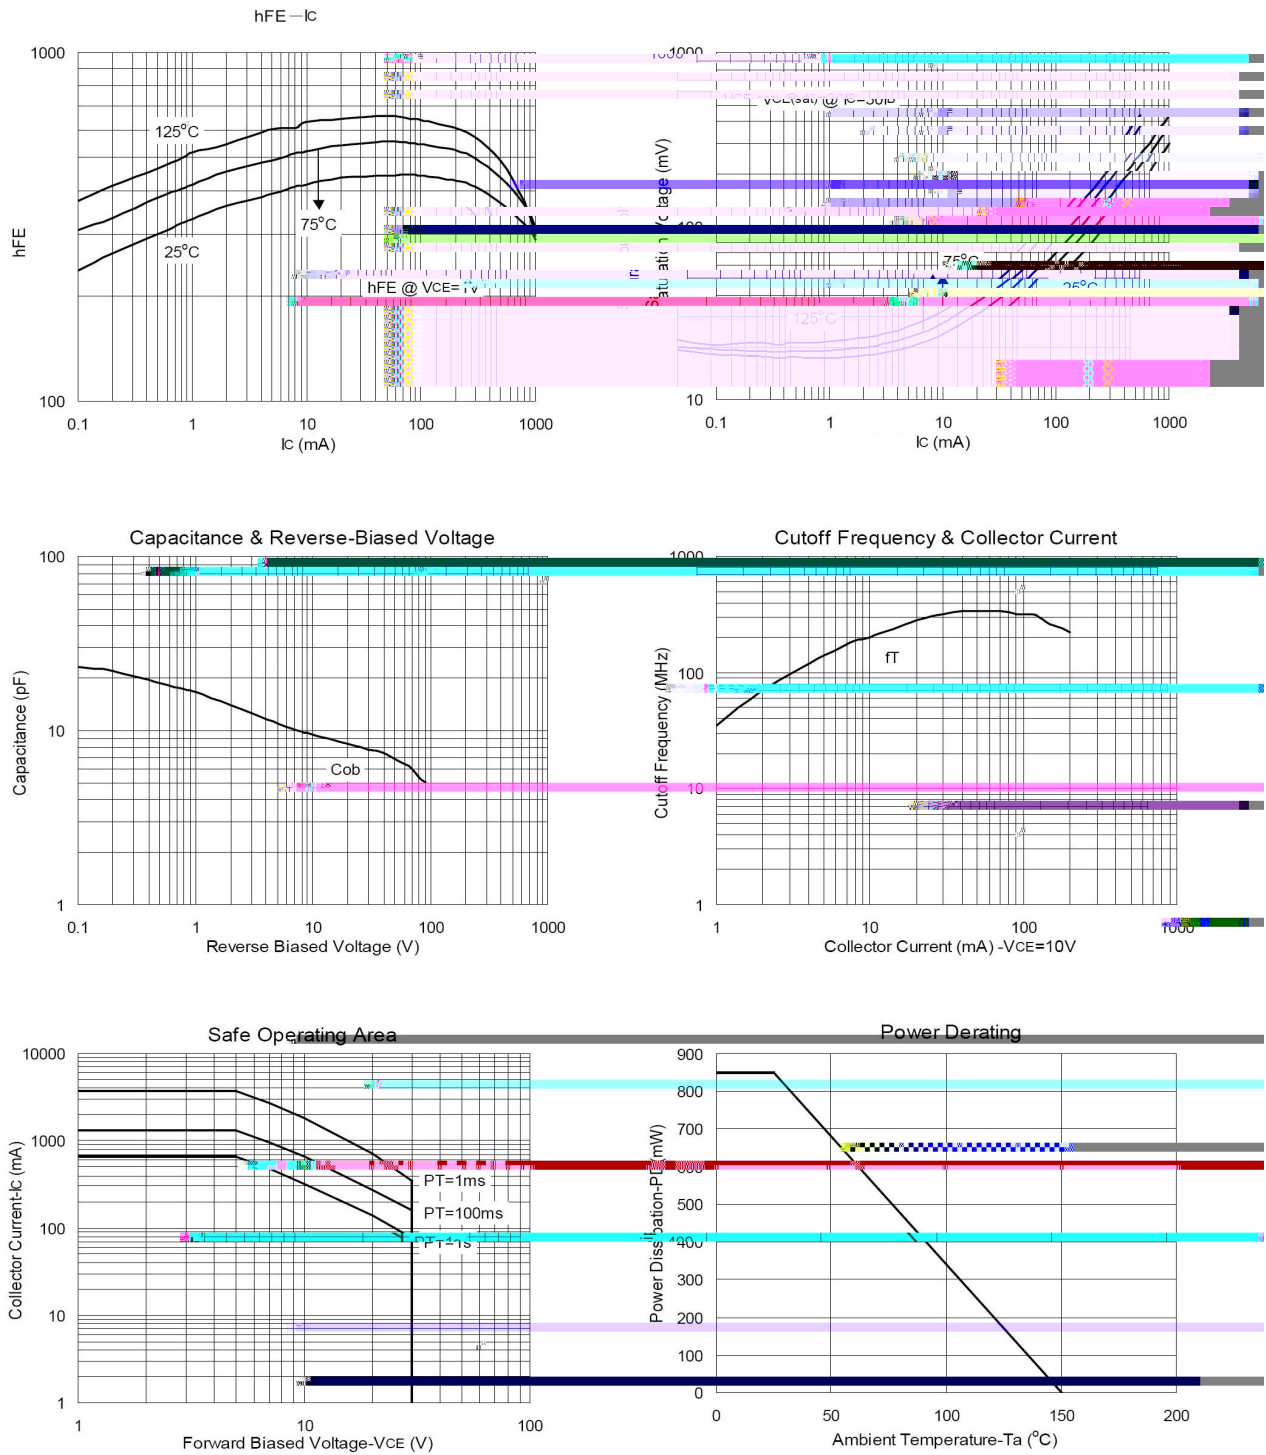

TD-92

Unit: mm

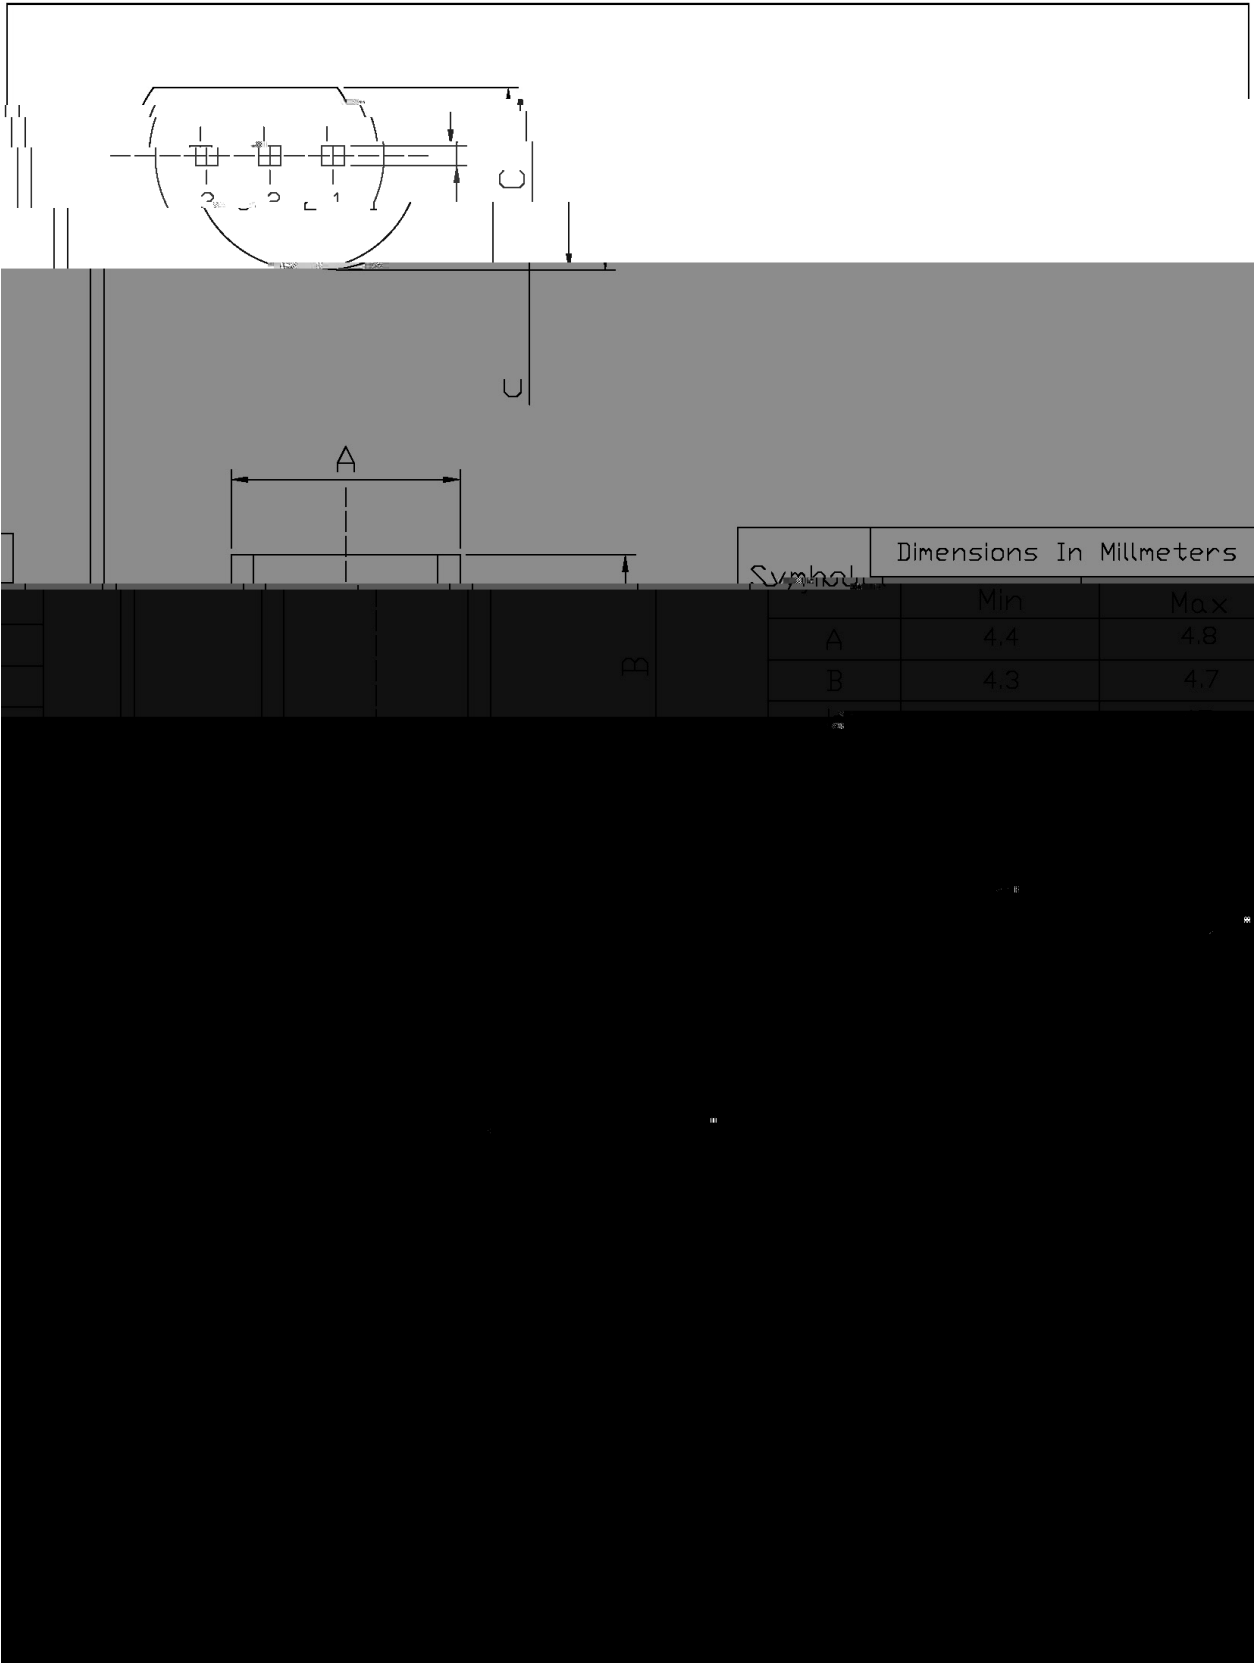

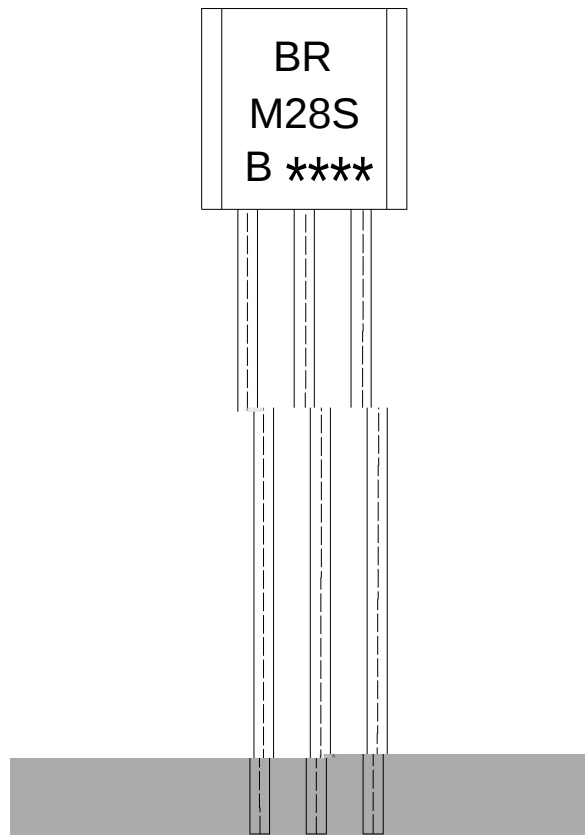

BR:

M28S

B: h_{FE}


Note:

BR: Company Code.

M28S: Product Type.

B: h_{FE} Classifications Symbol

****: Lot No. Code, code change with Lot No.

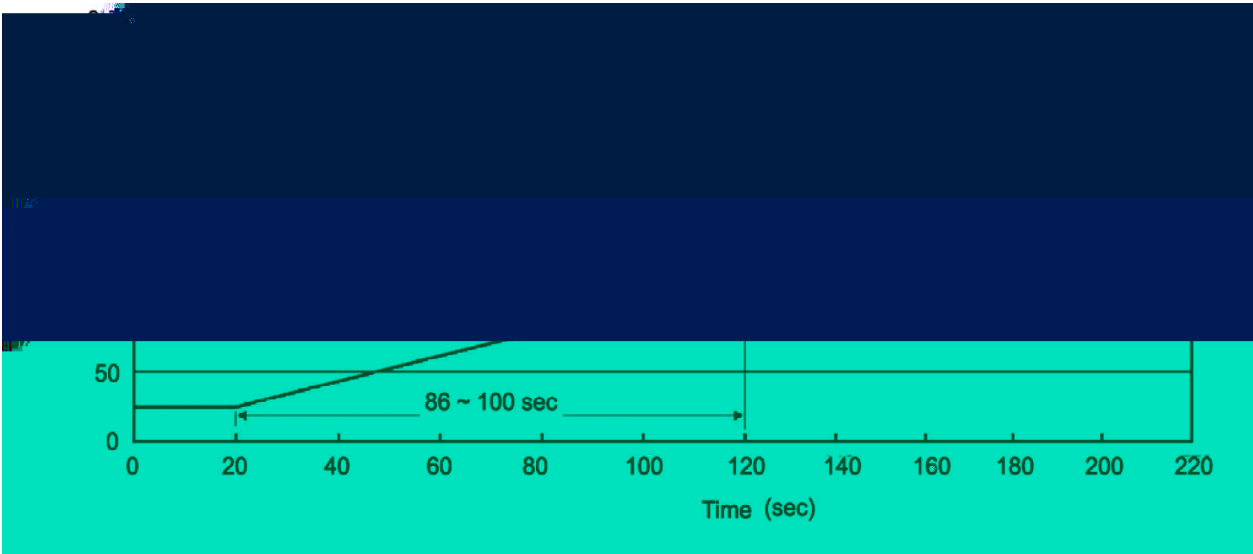

Note:

- | | | | | | |
|---|-------|-----|-----------|--------|---|
| 1 | 25 | 150 | 60 | 90sec; | 1.Preheating:25~150 , Time:60~90sec. |
| 2 | 255±5 | | 5±0.5sec; | | 2.Peak Temp.:255±5 , Duration:5±0.5sec. |
| 3 | | 2 | 10 | /sec. | 3. Cooling Speed: 2~10 /sec. |

270±5 10±1 sec. Temp:270±5 Time:10±1 sec

/ BULK

Package Type	Units					Dimension (unit mm3)		
	Units/Bag /	Bags/Inner Box /	Units/Inner Box /	Inner Boxes/Outer Box /	Units/Outer Box /	Bag	Inner Box	Outer Box
TO-92	1,000	10	10,000	5	50,000	135×190	237×172×102	560×245×195
	1,000	10	10,000	10	100,000	135×190	237×172×102	560×245×375

/ AMMO

Package Type	Units					Dimension (unit mm3)	
	Units/tape /	Tape/Inner Box /	Rows/Inner Box /	Inner Boxes/Outer Box /	Units/Outer Box /	Inner Box	Outer Box
TO-92	3,000	1	120	10	30,000	328×230×42	480×346×235 547×407×268