

MBR3045CT

TO-220



/ h_{FE} Classifications & Marking







/ Absolute Maximum Ratings(Ta=25)

	θ		


/ Electrical Characteristics(Ta=25)

						μ

/ Electrical Characteristic Curve

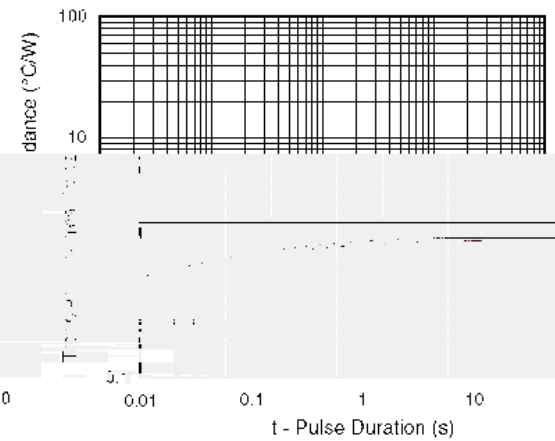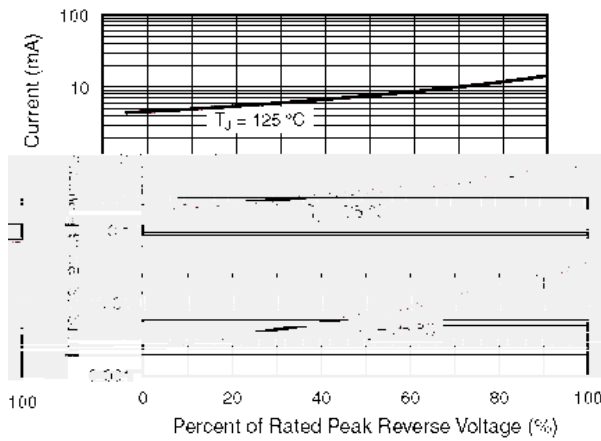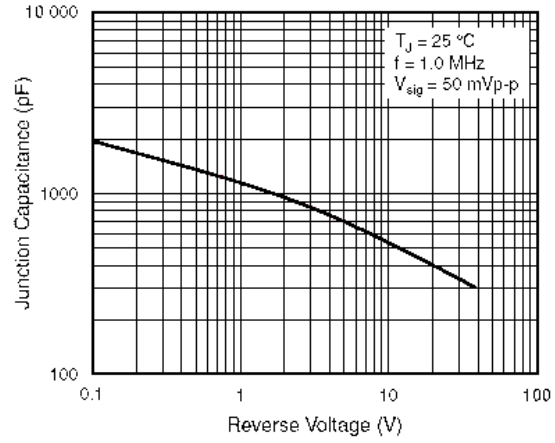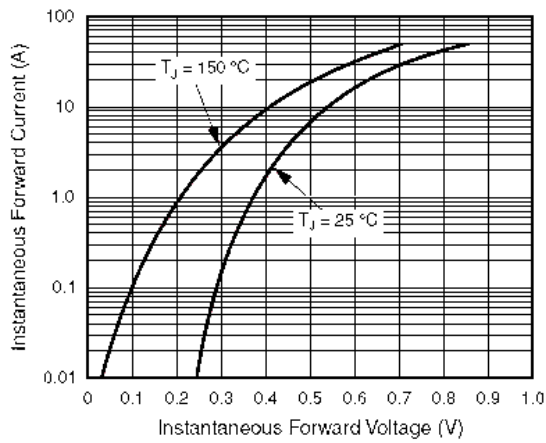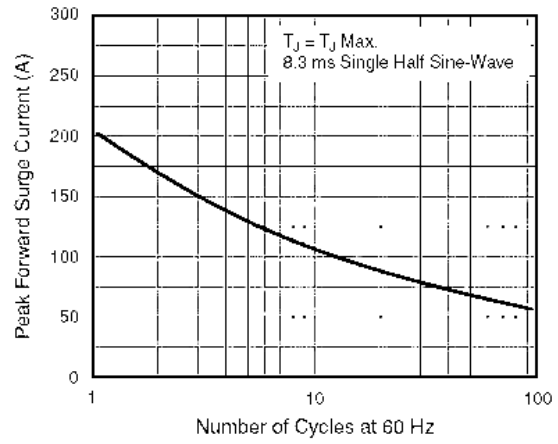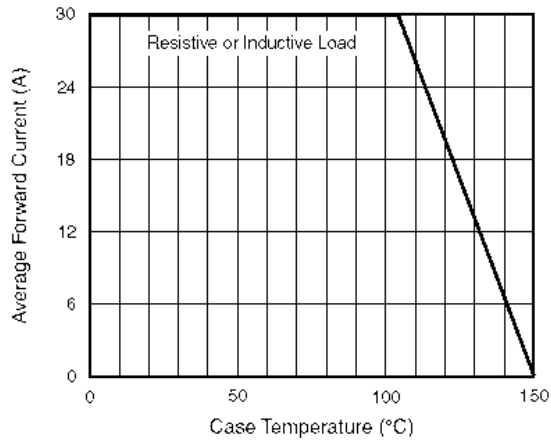


I Package Dimensions

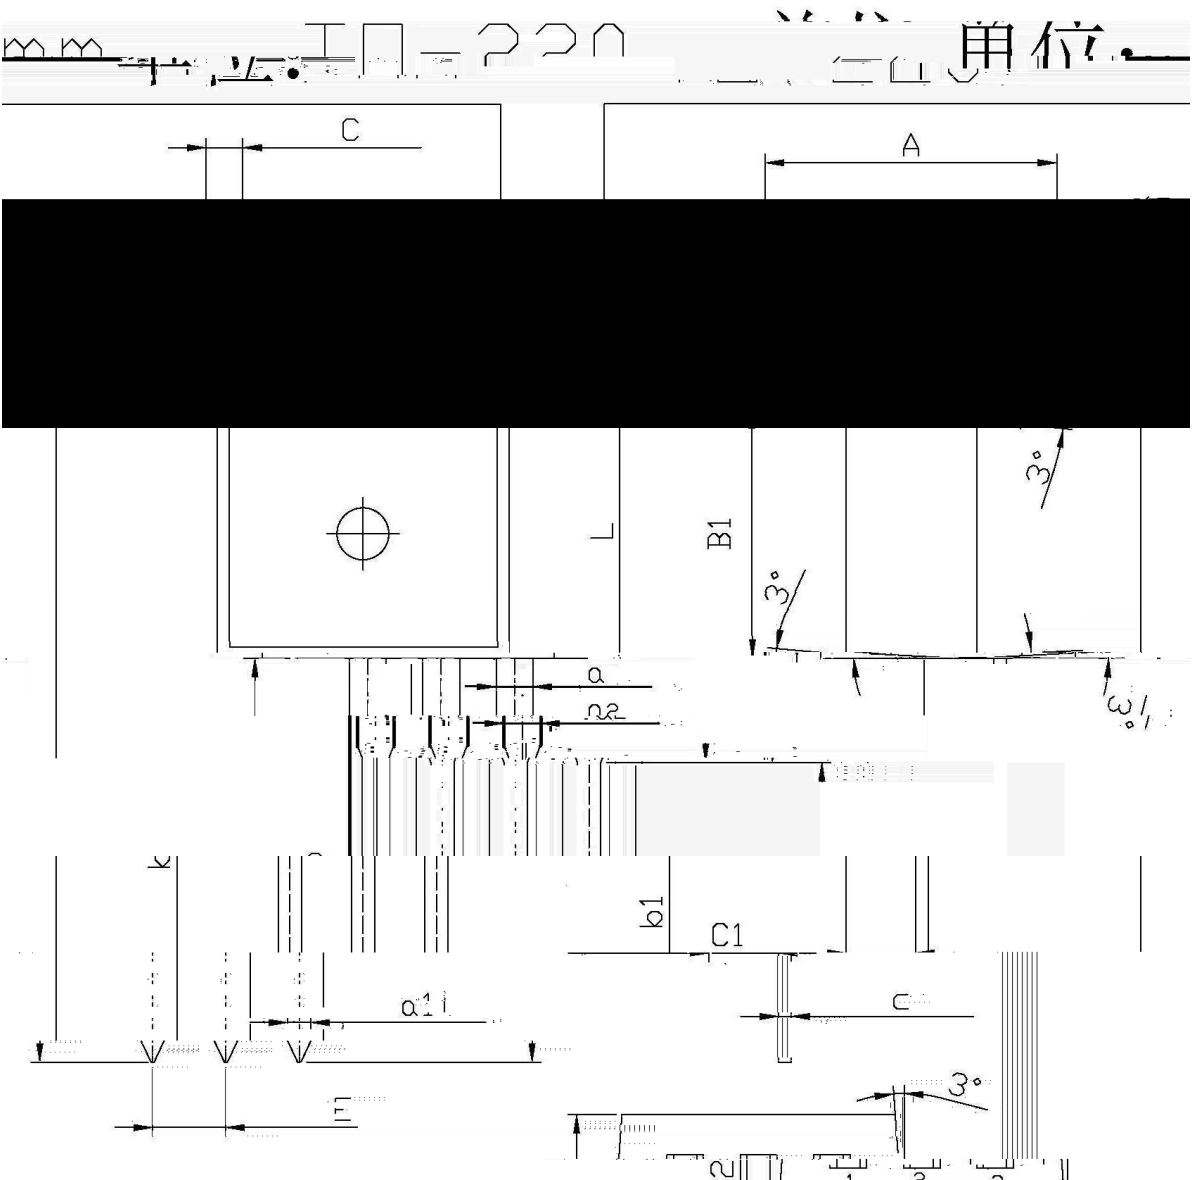

DIMENSIONS IN INCHES			DIMENSIONS IN MILLIMETERS		
Symbol	Min	Max	Symbol	Min	Max
A	9.8	10.2	C	12	14
B	6.3	6.7			
B1	9.0	9.4			15.7
C1	2.0	2.2			

/ Marking Instructions

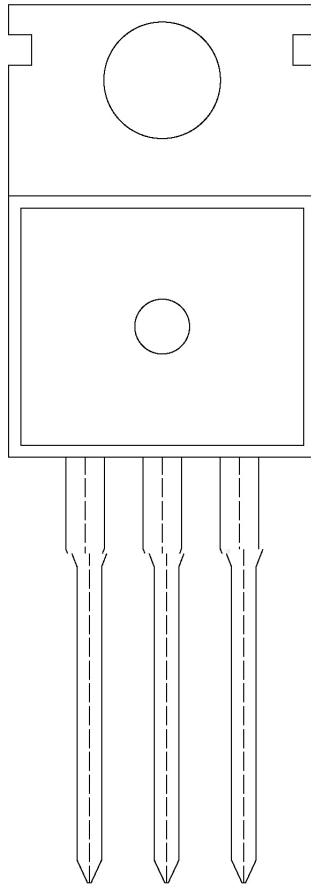


BR

MBR3045

CT:

() / Temperature Profile for Dip Soldering(Pb-Free)

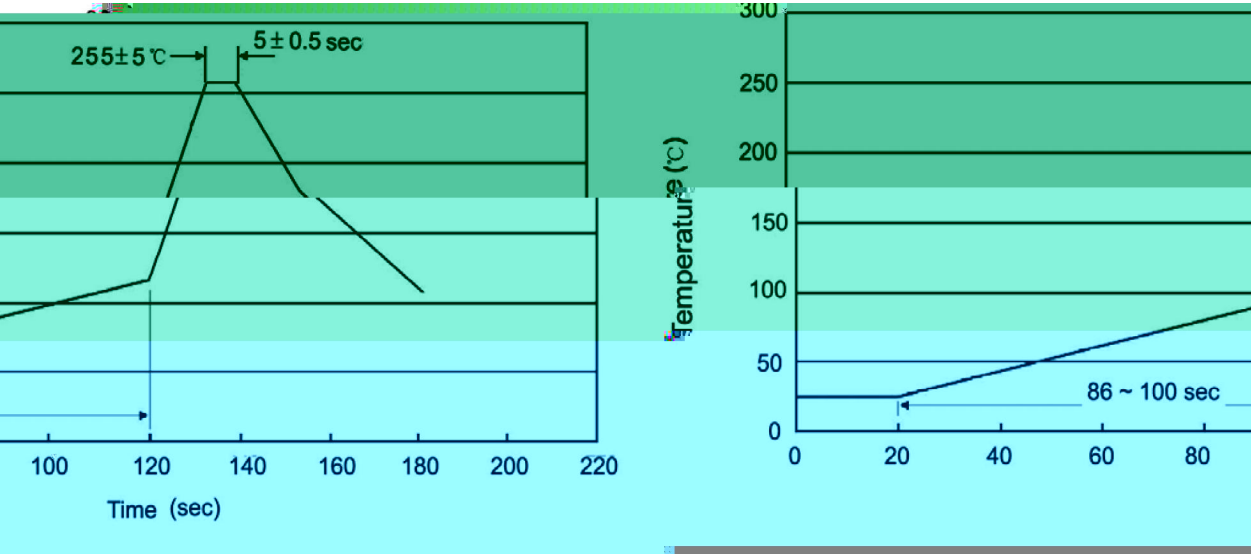

± ± ± ±

/ Resistance to Soldering Heat Test Conditions

± ±

/ Packaging SPEC.

封装形式	包装数量					包装尺寸		
	只 袋	袋 盒	只 盒	盒 箱	只 箱	袋	盒	箱

封装形式	包装数量					包装尺寸		
	只 套管	套管 盒	只 盒	盒 箱	只 箱	套管	盒	箱

/ Notices