

MMBTH10

/ Descriptions


SOT-23 NPN

/ Features

/ Applications

100μA-20mA
μ

/ Equivalent Circuit



/ Pinning




/ Marking

/ Absolute Maximum Ratings(Ta=25 –)

/ Electrical Characteristics(Ta=25 –)

		μ				
		μ				
						μ
						μ


/ Electrical Characteristic Curve

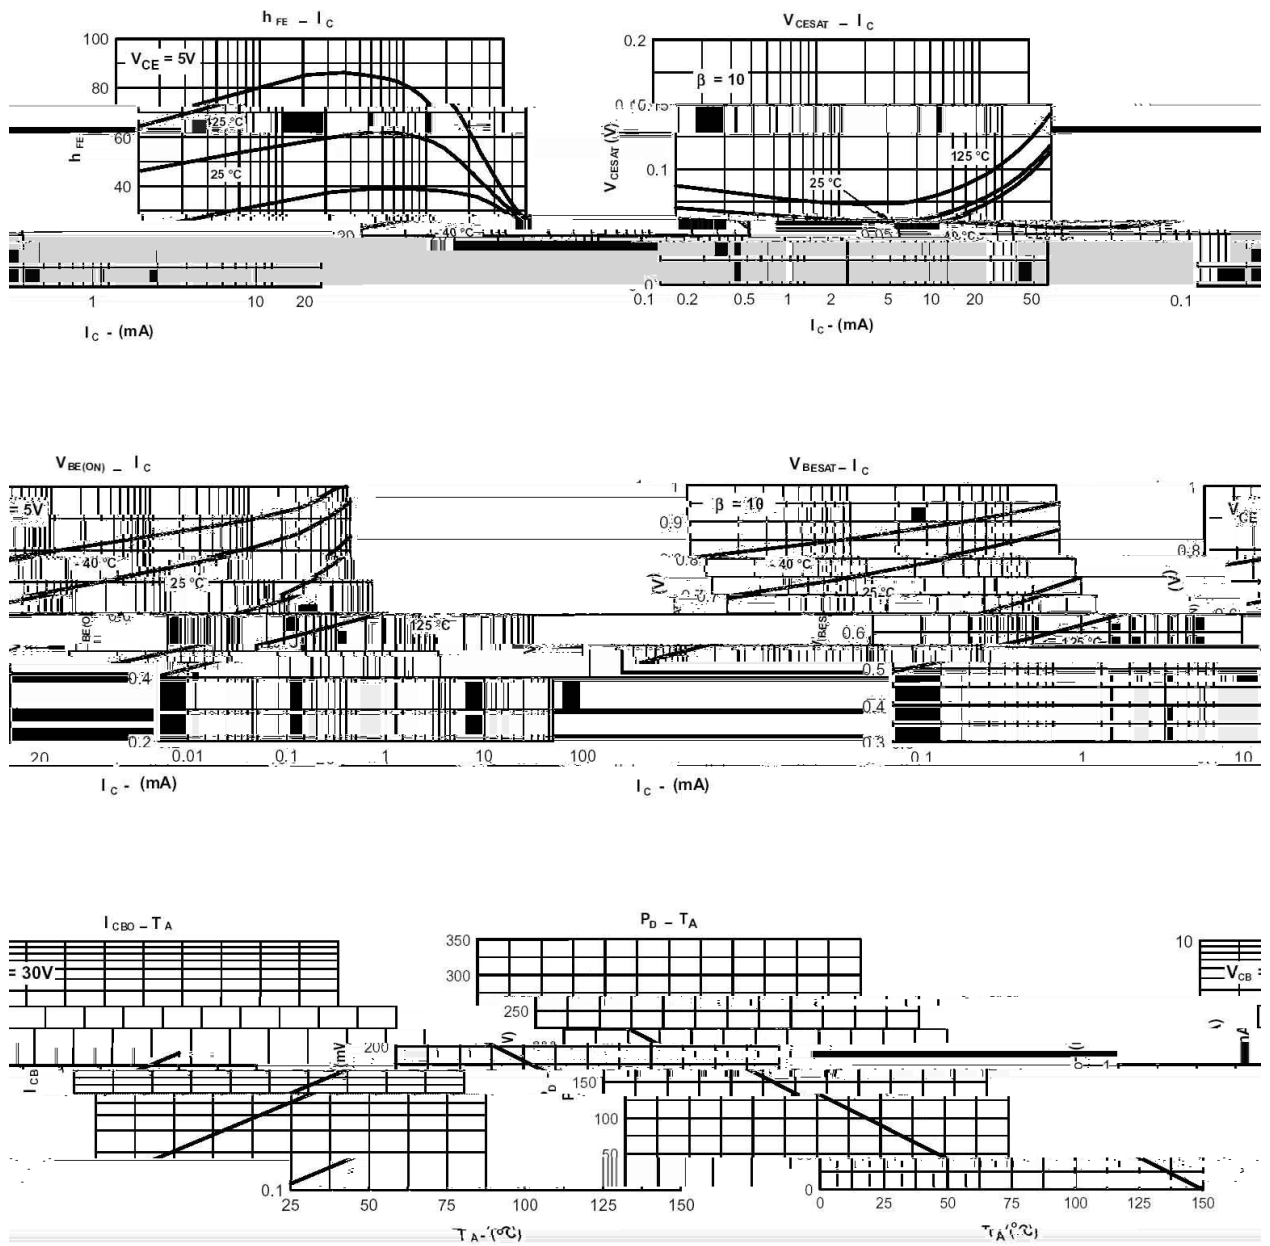


/ Package Dimensions

SOT-23


单位：mm

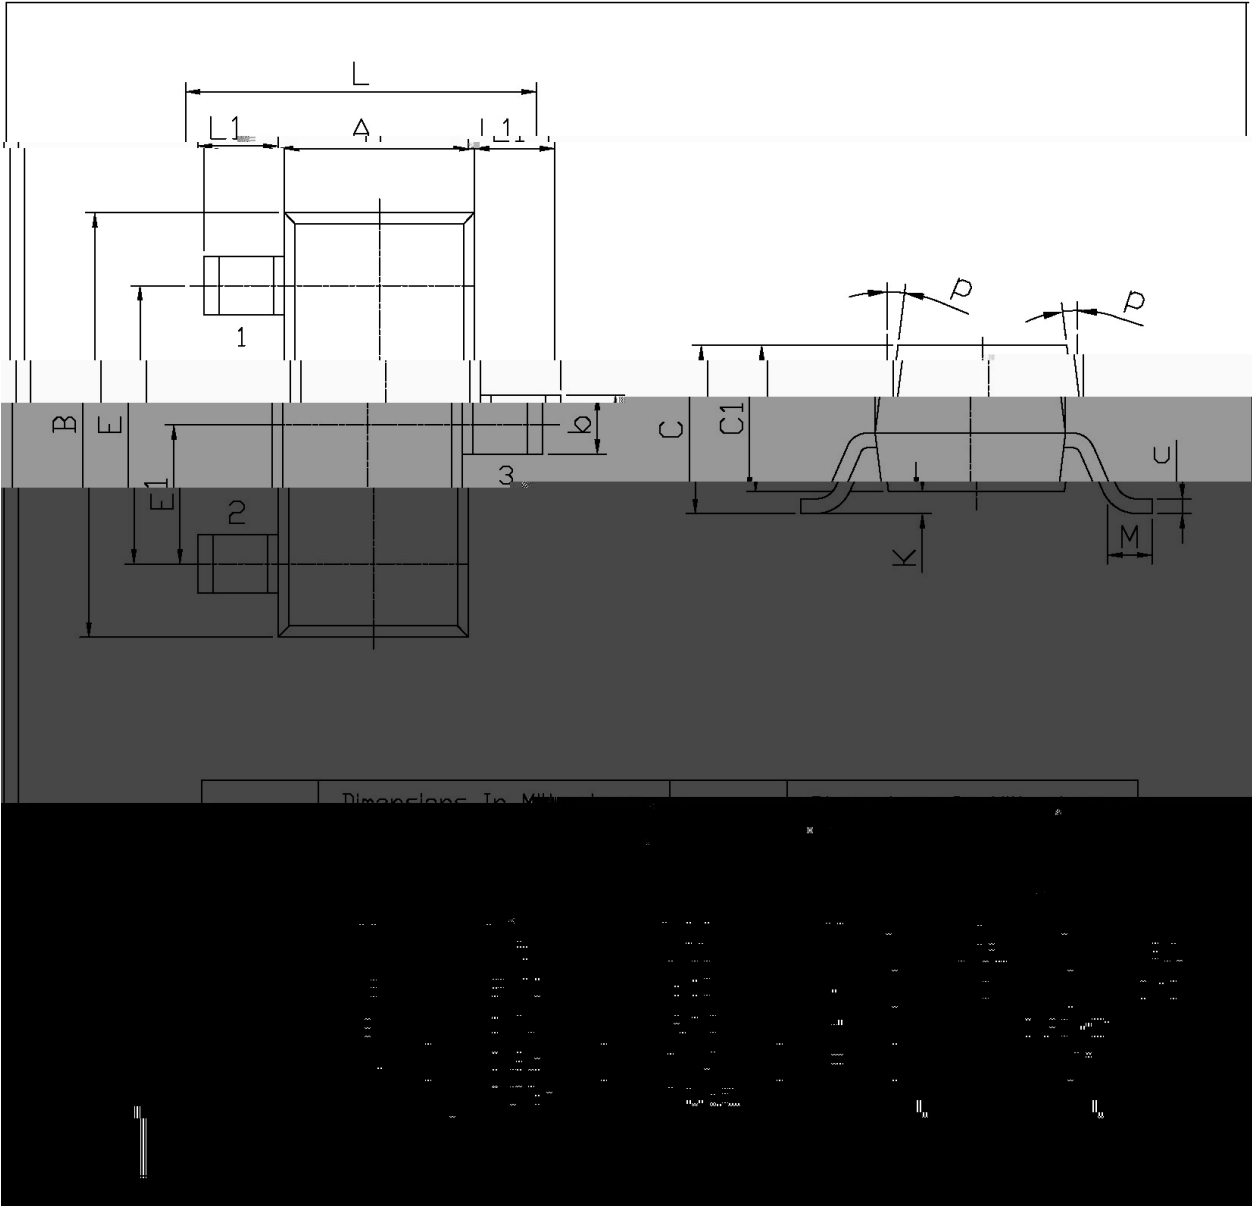

/ Marking Instructions

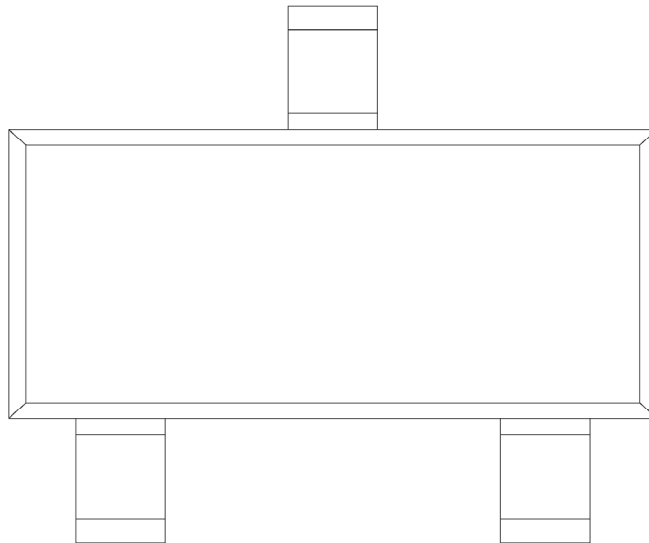

() / Whp shudwxuh Suriloh i ru LU Uhior z Vroghulqj+Se0luhh,

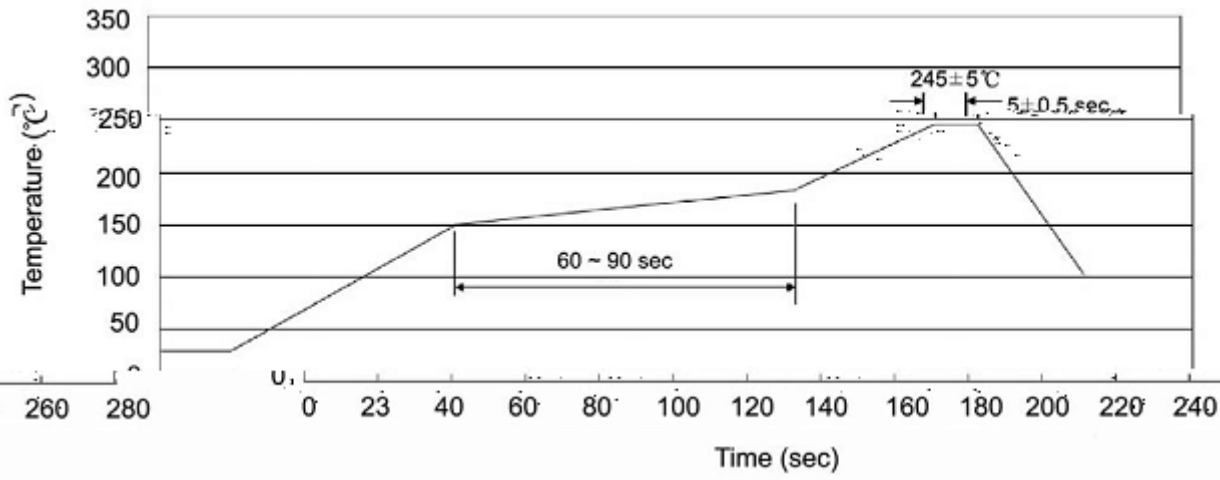

± ± ± ±

/ Resistance to Soldering Heat Test Conditions

± ± ± ±

/ Packaging SPEC.

	Units/Reel /	Reels/Inner Box /	Units/Inner Box /	Inner Boxes/Outer Box /	Units/Outer Box /	Reel	Inner Box	Outer Box
SOT-23	3,000	10	30,000	6	180,000	7 ×8	180×120×180	390×385×205

/ Notices