

MURF1660CT


/ Descriptions

TO-220F


/ Features

/ Applications

/ Equivalent Circuit



/ Pinning



/ h_{FE} Classifications & Marking

/ Absolute Maximum Ratings(Ta=25)






	θ		℃
			℃

/ Electrical Characteristics(Ta=25)

						μ
						μ

1.


/ Electrical Characteristic Curve

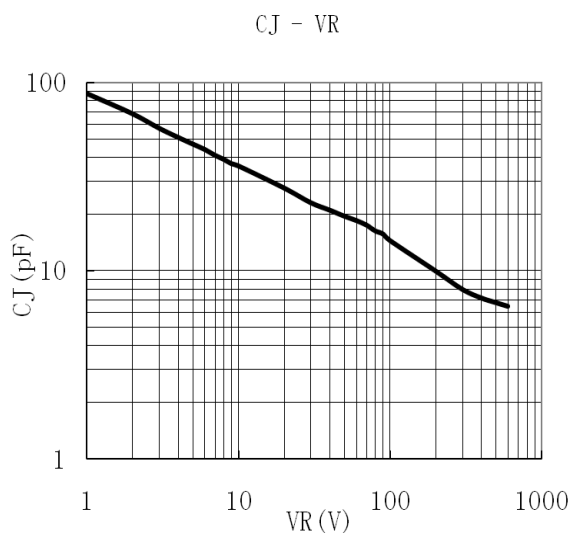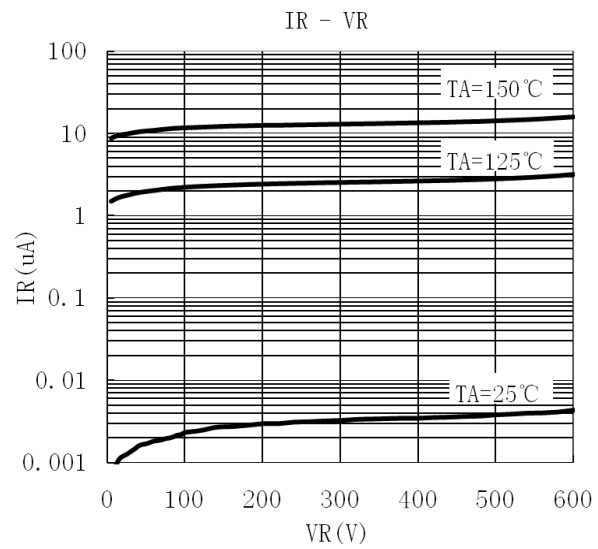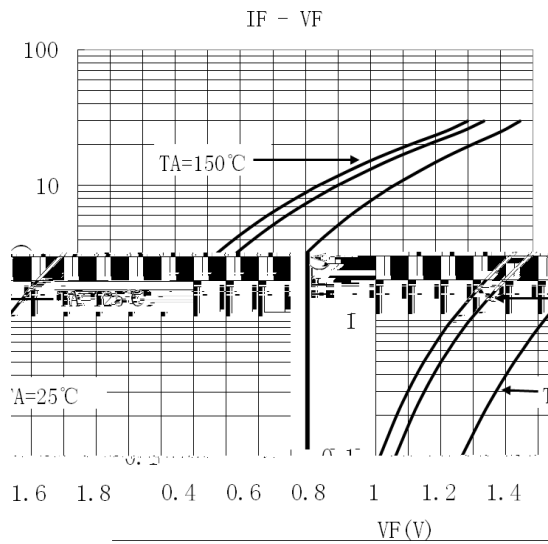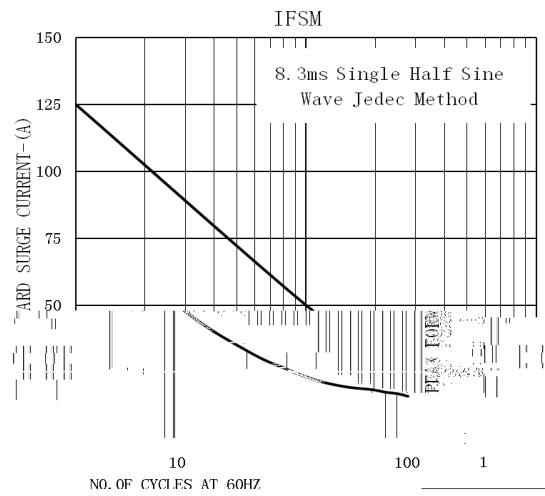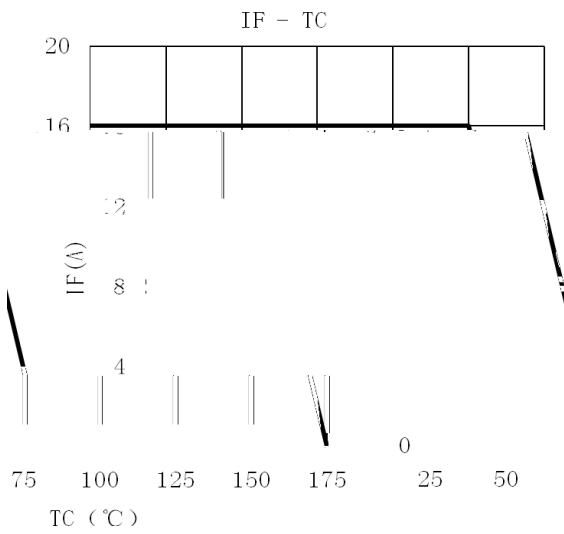


/ Package Dimensions

T0-220F

单位: 

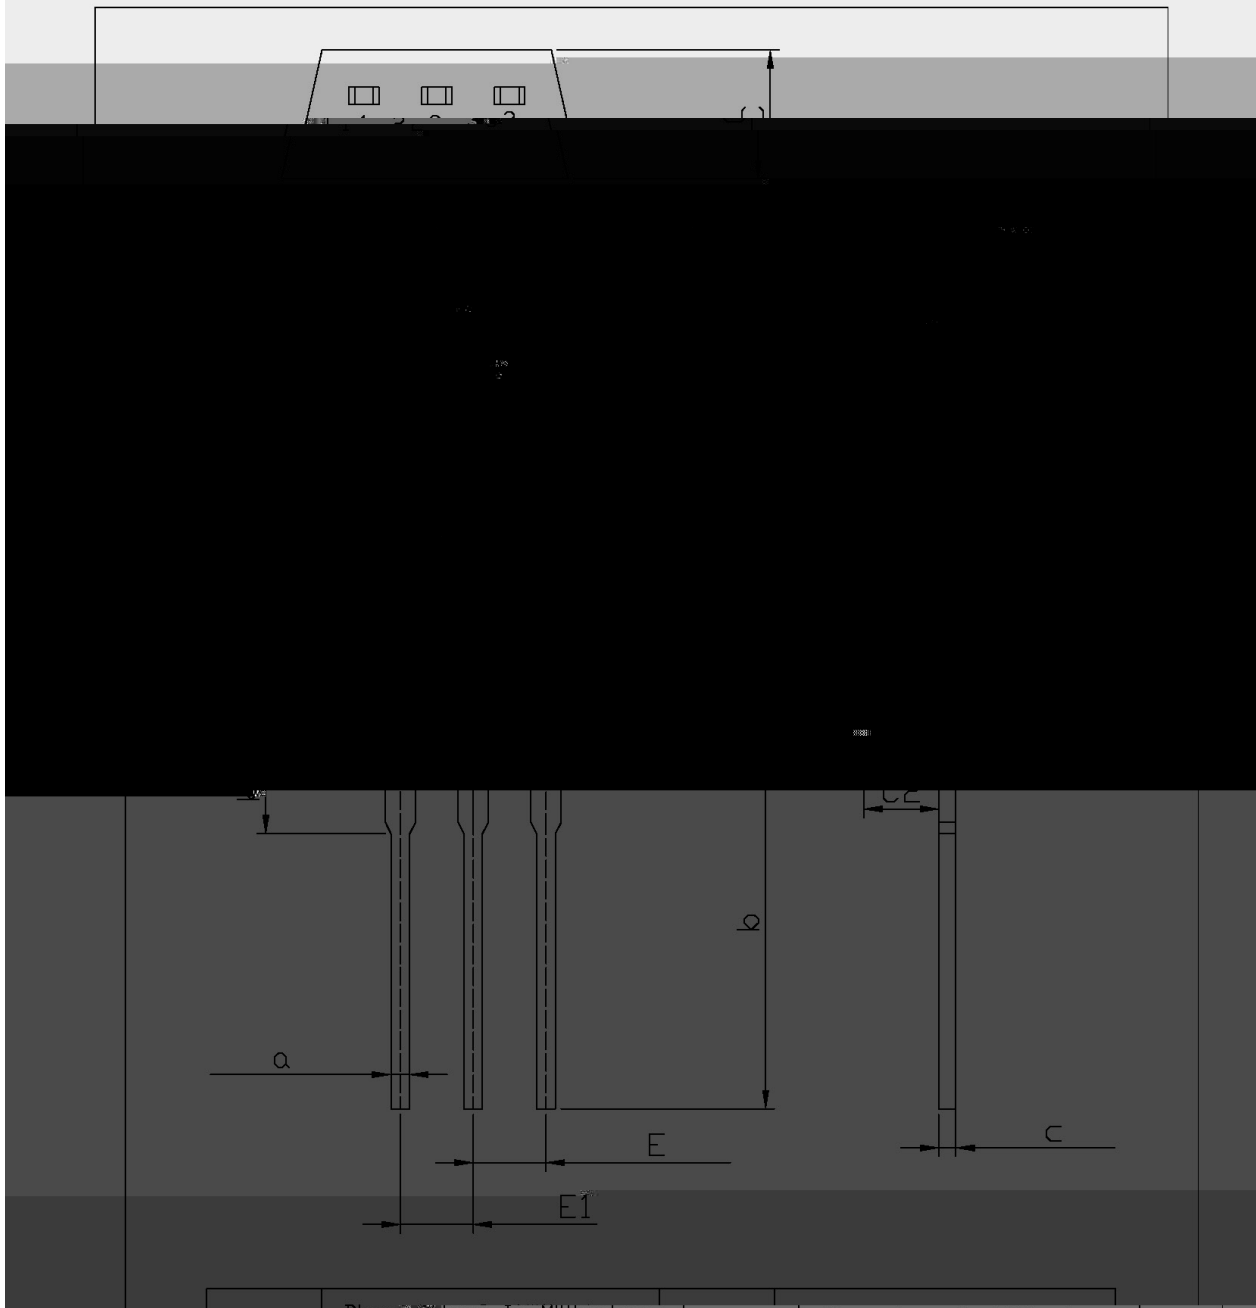


/ Marking Instructions

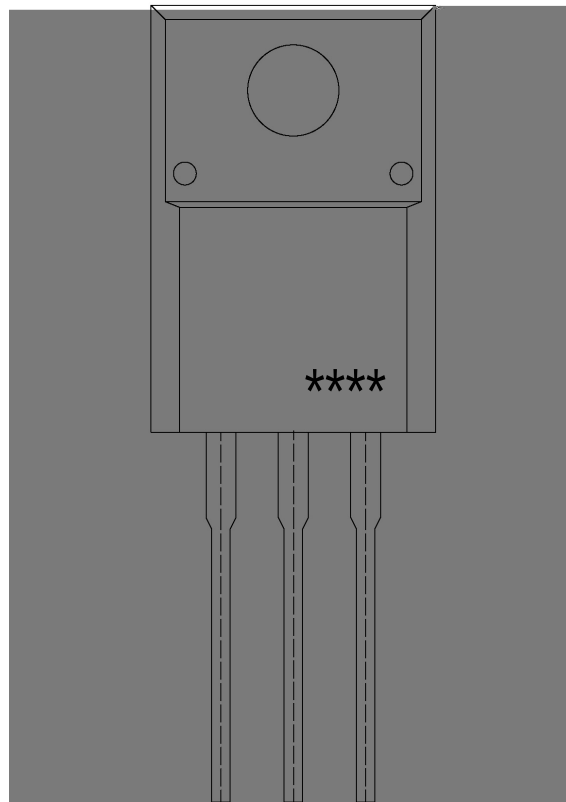

BR

MURF1660

CT:

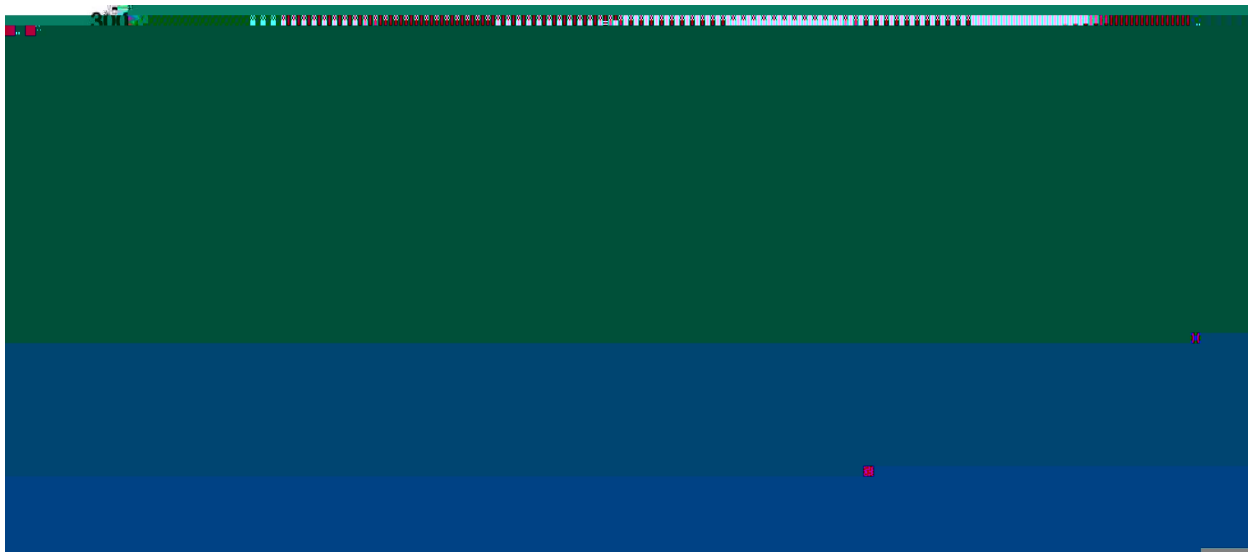 $\pm$ $\pm$ $\pm$ $\pm$ $\pm$ $\pm$

°C

	Units/Bag /	Bags/Inner Box /	Units/Inner Box /	Inner Boxes/Outer Box /	Units/Outer Box /	Bag	Inner Box	Outer Box
TO-220/F	200	10	2,000	5	10,000	135×190	237×172×102	560×245×195

	Units/Tube /	Tubes/Inner Box /	Units/Inner Box /	Inner Boxes/Outer Box /	Units/Outer Box /	Tube	Inner Box	Outer Box
TO-220/F	50	20	1,000	5	5,000	532×31.4×5.5	555×164×50	575×290×180

6 6