

RS2AB~RS2MB



DATA SHEET

	V _{RRM}								

/ Electrical Characteristic Curve

Fig.1 Forward Current Derating Curve

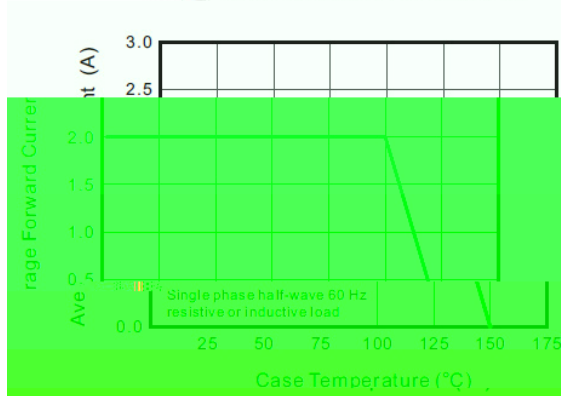


Fig.2 Typical Reverse Characteristics

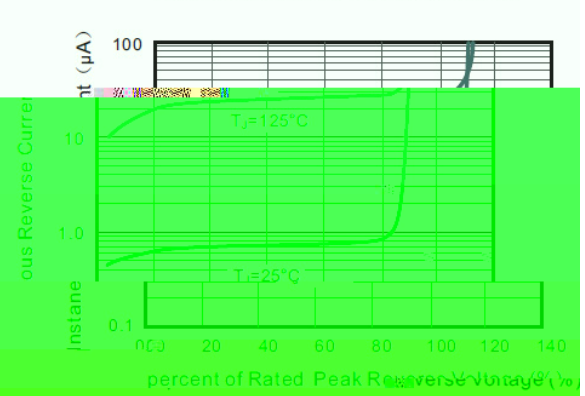


Fig.3 Typical Instantaneous Forward Characteristics

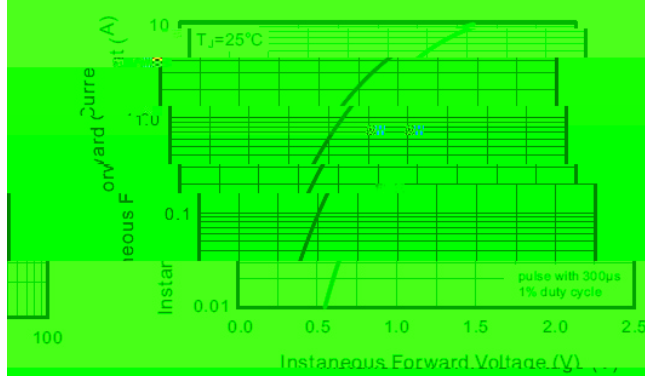


Fig.4 Typical Junction Capacitance


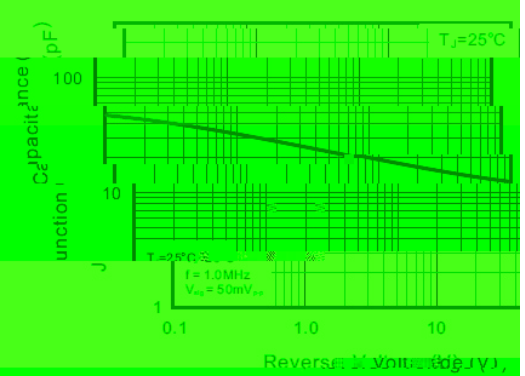



Fig.5 Maximum Non-Repetitive Peak Forward Surge Current

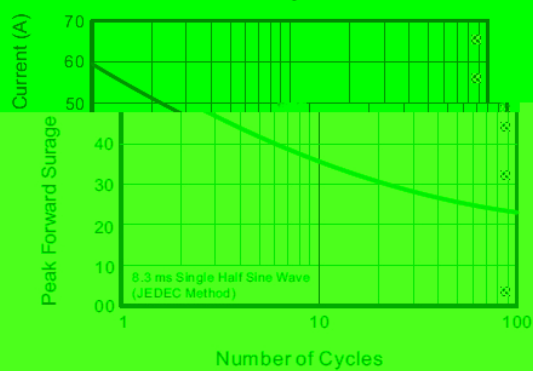

Marking

Type number	Marking code
RS2AB	RS2A
RS2BB	RS2B
RS2GB	RS2G
RS2JB	RS2J

/ Marking Instructions

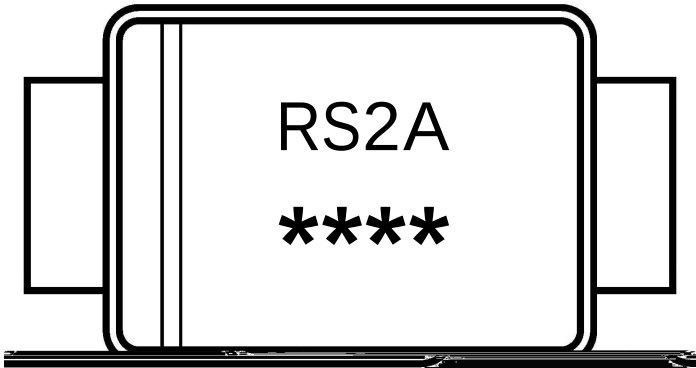


RS2A

1

3

RS2A

() /

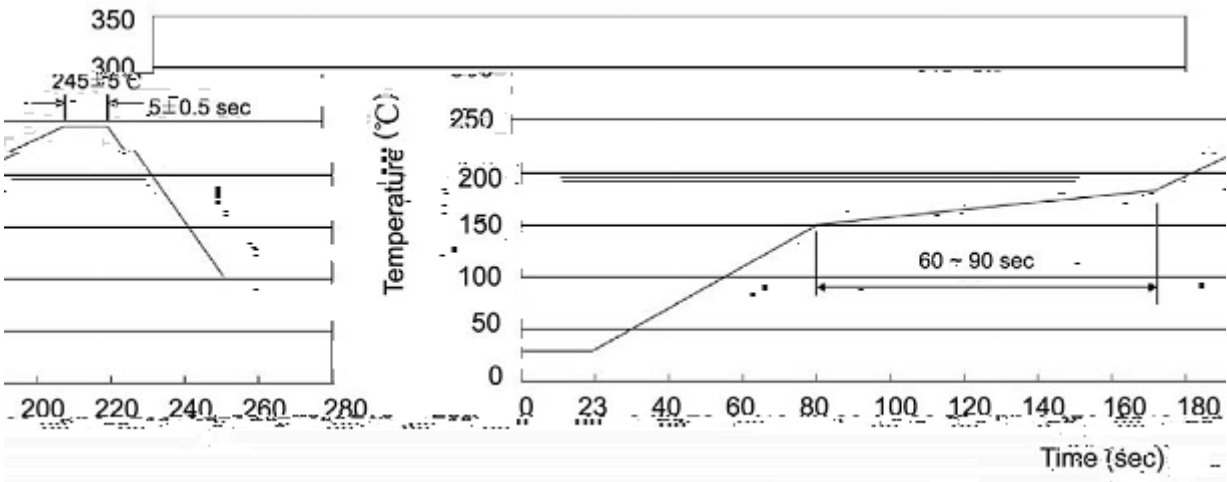

±

±

±

±

/ Resistance to Soldering Heat Test Conditions

±

±

±

±

/ Packaging SPEC.

/ Notices