

RS2MAF



DATA SHEET

4333Y

513A

VMAI


/ Absolute Maximum Ratings(Ta=25)

℃	()		
)			
)	θ		℃
	θ		℃
			℃

/ Electrical Characteristics(Ta=25)


			数值	
		℃		μ
		℃		μ

/ Electrical Characteristic Curve

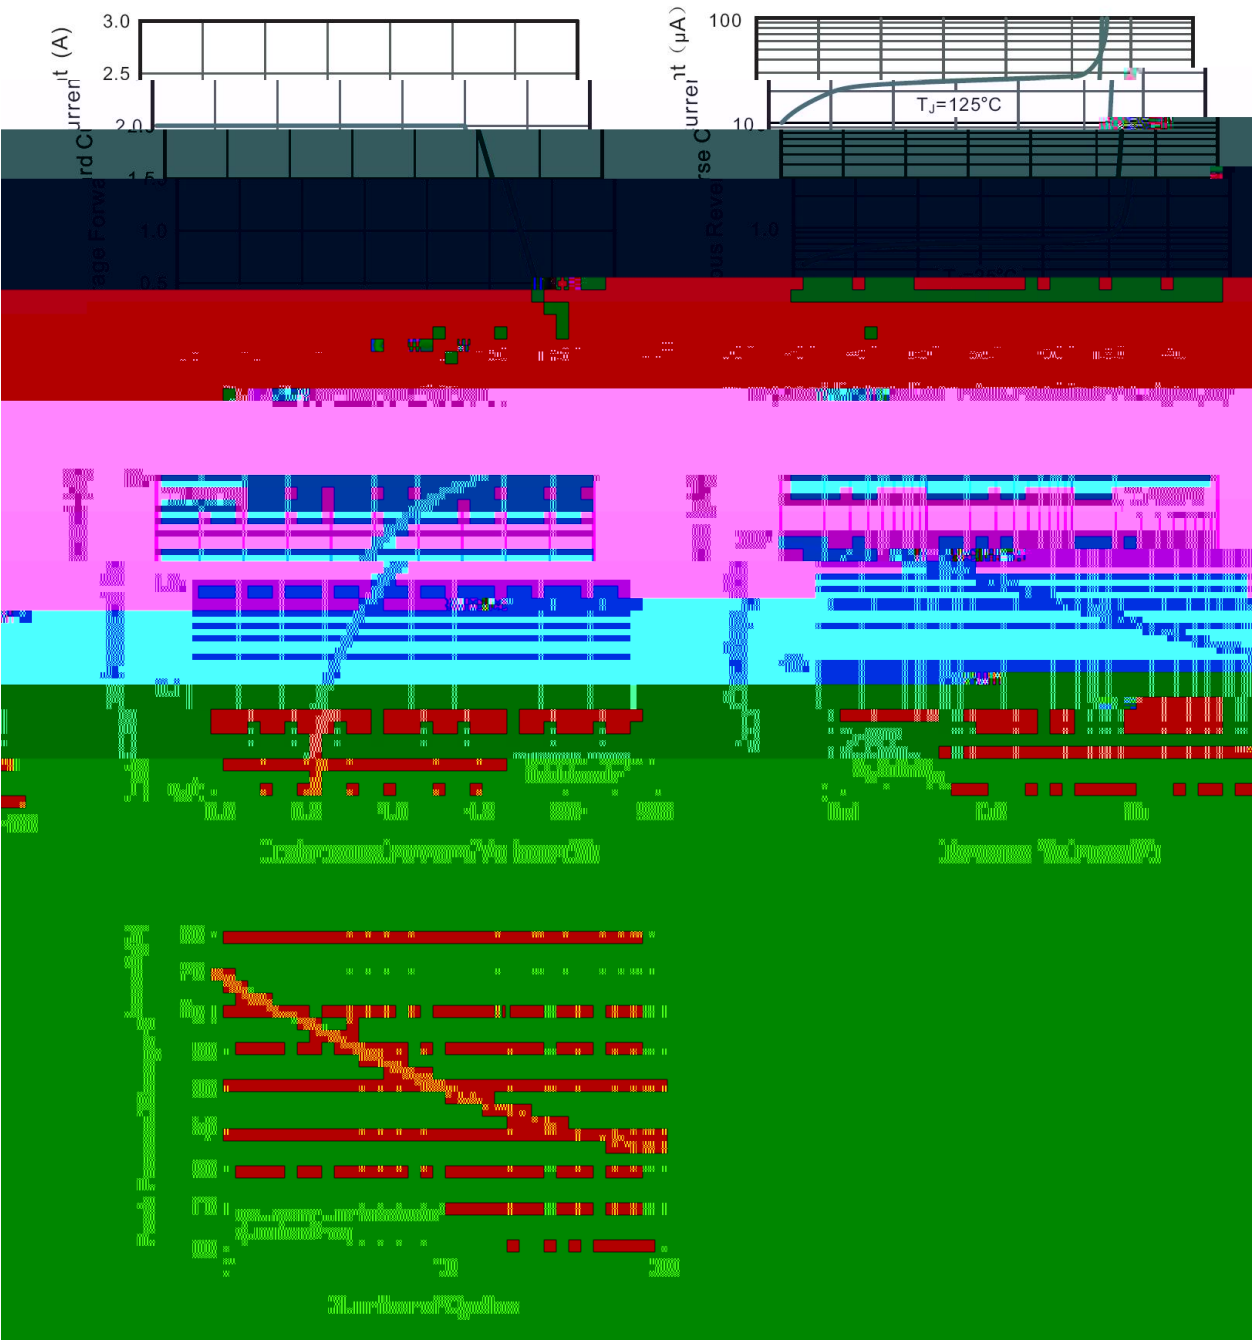

RS2MAF

/ Marking Instructions

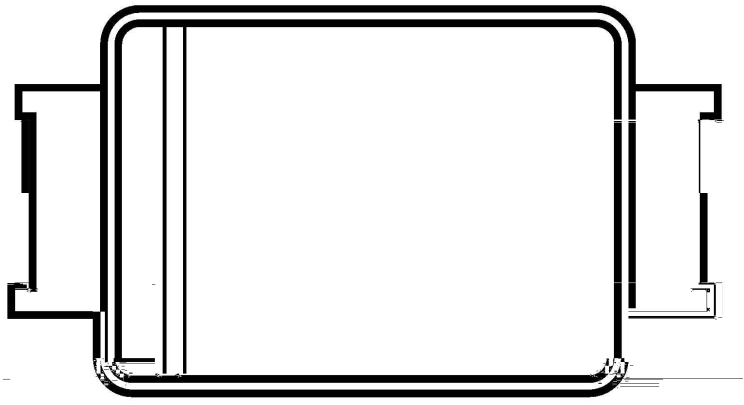


UV5MA04

4 X

6 X

UV5MA04

() /

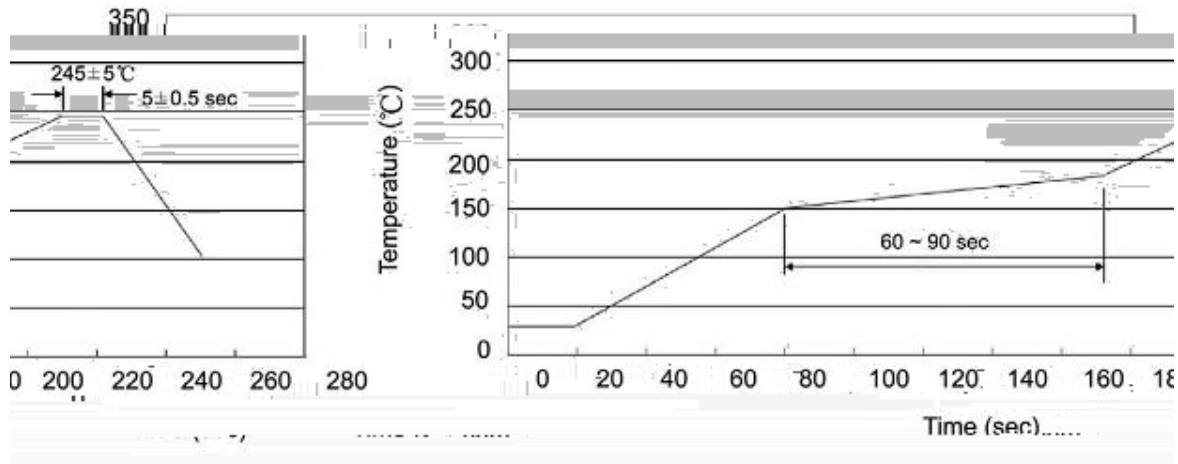

± ± ± ±

/ Resistance to Soldering Heat Test Conditions

± ± ± ±

/ Packaging SPEC.

封装形式	包装数量					包装尺寸		
	只 卷盘	卷盘 盒	只 盒	盒 箱	只 箱		盒	箱
						"		

/ Notices