

/ Descriptions

/ Features


0

/ Applications

/ Equivalent Circuit




/ Pinning



PIN	DESCRIPTION
1	Cathode
2	Anode

The recommended mounting pad size

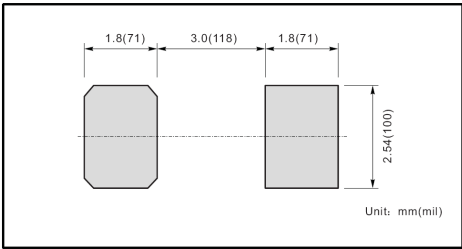

/ Marking


/ Absolute Maximum Ratings(Ta=25)

℃	()								
)									
)									℃
									℃


/ Electrical Characteristics(Ta=25)

			数值	
		℃		μ
		℃		μ

/ Electrical Characteristic Curve

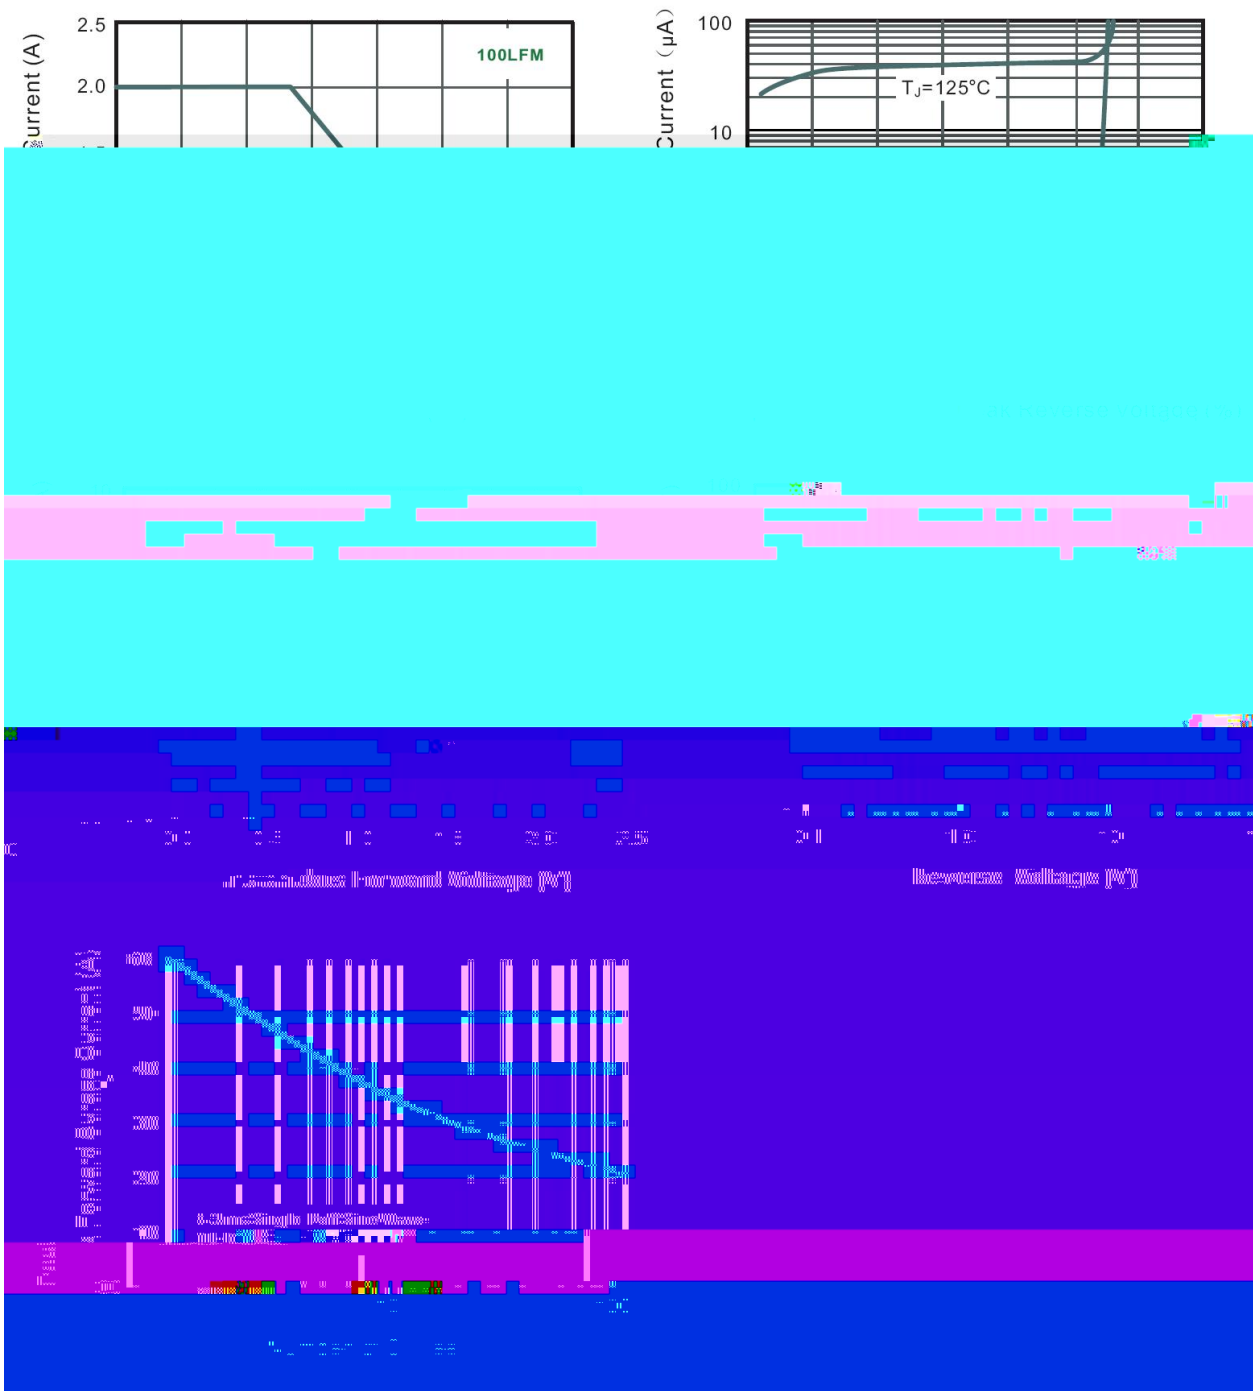


/ Package Dimensions

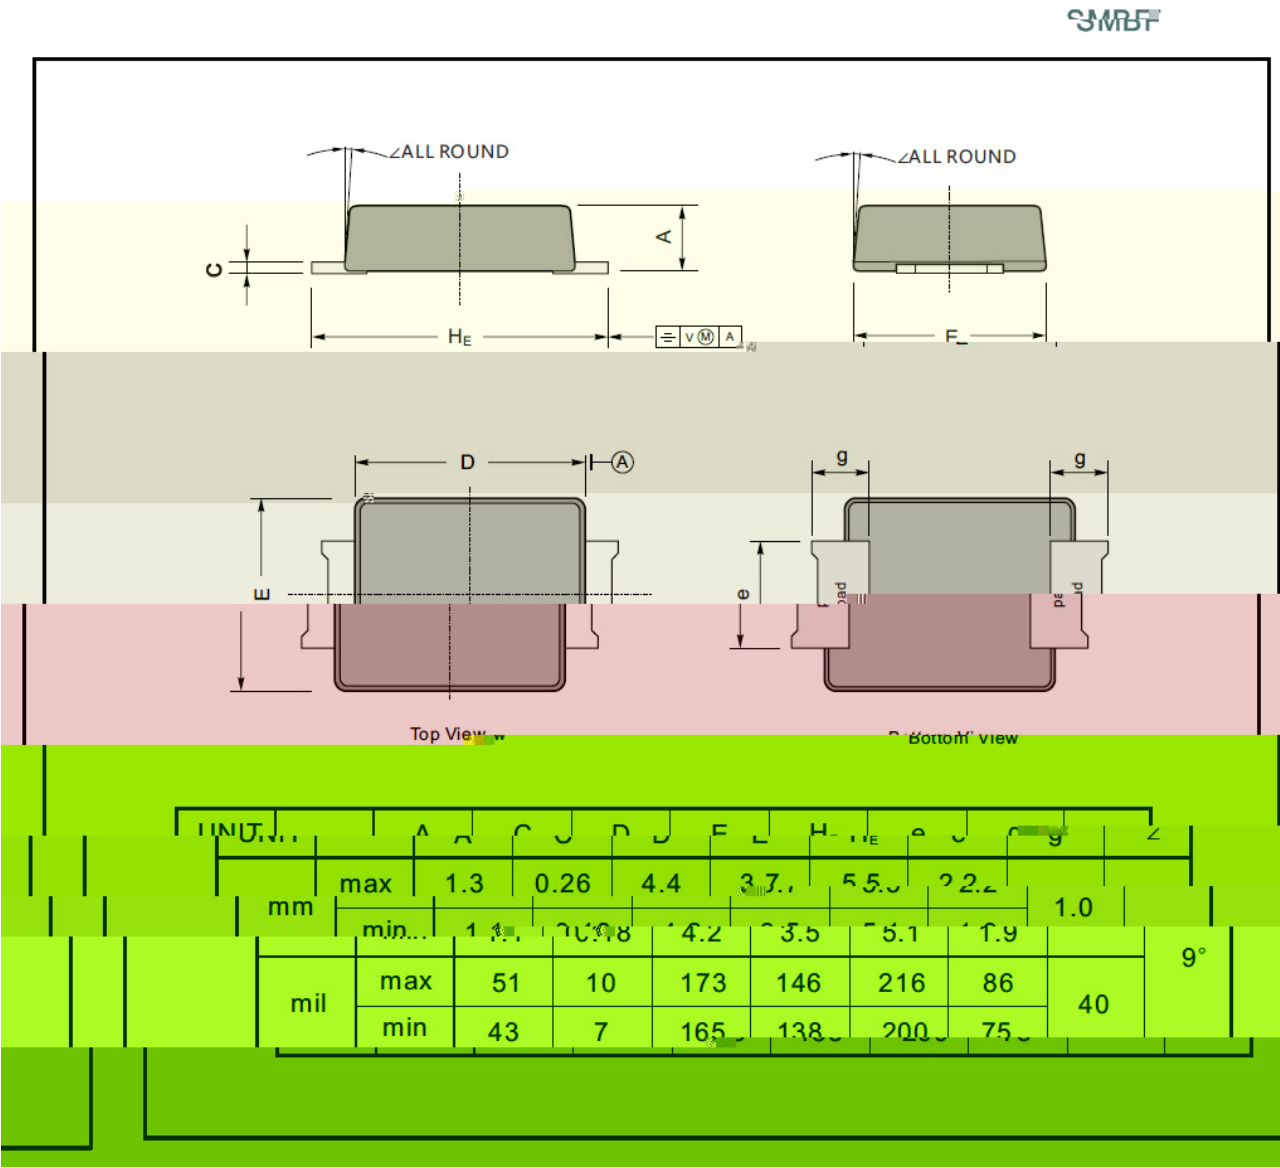

Marking

Type number	Marking code
S2ABF	S2AB
S2BBF	S2BB
S2DBF	S2DB
S2GBF	S2GB
S2JBF	S2JB
S2KBF	S2KB
S2MBF	S2MB

/ Marking Instructions

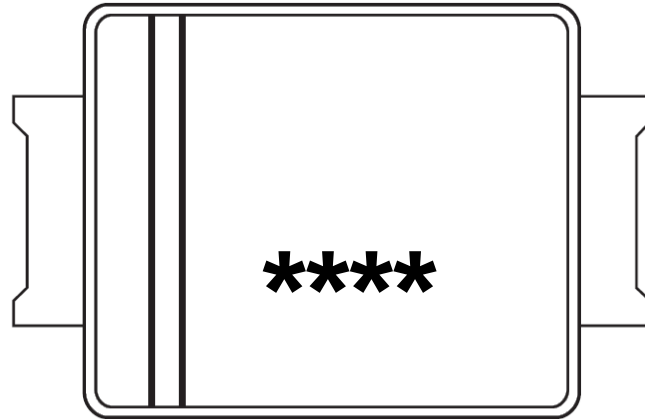

S2ABF~S2MBF



DATA SHEET

() /