

11

[illegible]

S8KC~S8MC

!"#\$%&'()*+,-./:;<=>?@AB CDEFGHIJKLMNOPQRSTUVWXYZ [\] ^ _ ` { | } ~ " ' " DATA SHEET

800~1000V

8.0A 678 "

6920:3 "749;+ "< ; 2:=">92,41 "6?-?34;" 3+?0? 20" 21 "A4=+:B : C(("+4"))((("A0"\$42/:2D"

8922 ;+-C!(E"06 7 8", :3F:B !"

11

RoHS 2011/65/EU

<=:11">:11? :+ D"8*?,"G9;3+?4;@H :D"02 "?;"345 ,=I"

S8KC~S8MC



!"#\$%&'(')*****DATA SHEET

11


" >:2:5 + 2"	" 615%4:"	" :+?;B"		" K;?+"
7:P?595" >:F" 21 " A4+:B "	A 7"	S8KC" 800"	S8MC" 1000"	A"
7:P?595" 7 6" 4+:B "	A 7 6"	560"	700"	A"
7:P?595"Q8" #-43F?;B"A4+:B "	A_{Q8}"	800"	1000"	A"
7:P?595"E 2:B " \$42/:2D" 3+:0? D" 8922 :+"	Q\$ (EA) " C!("			E"

88

Fig. 2. Typical Reverse Characteristics

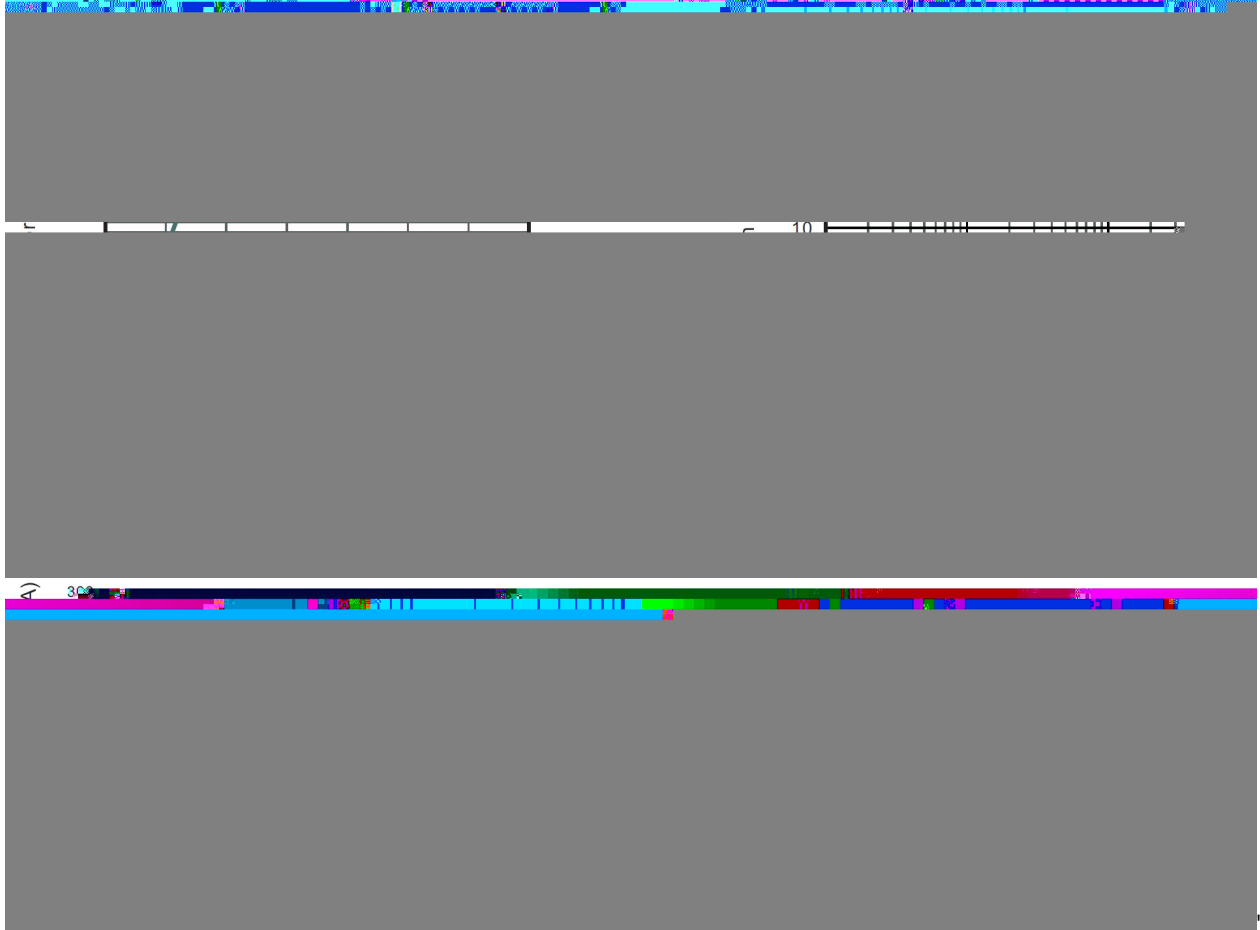

/ Package Dimensions

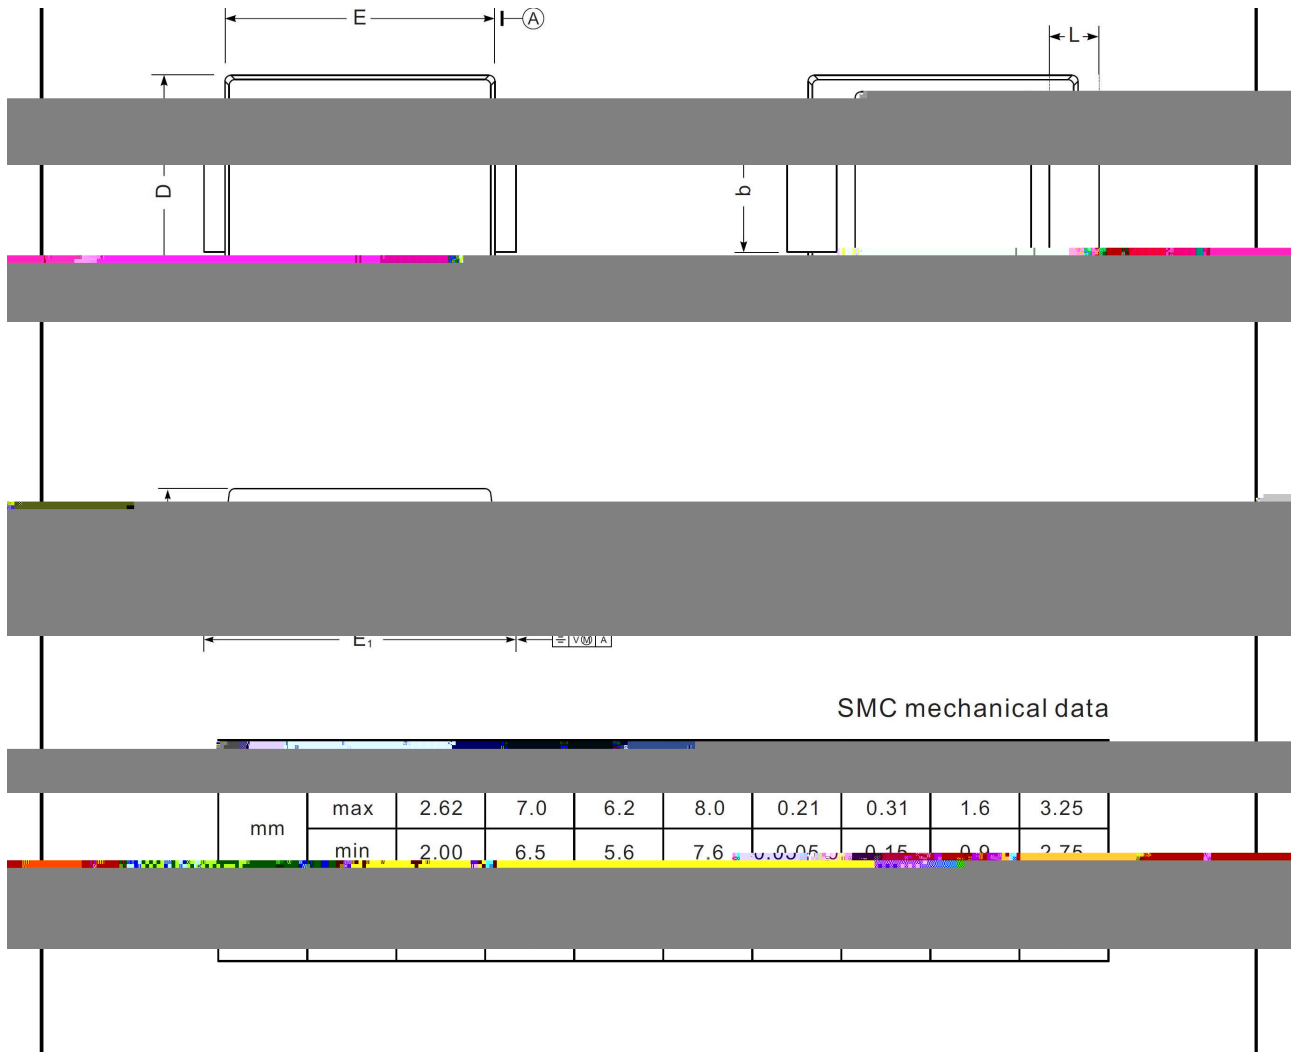


11

11

Type number	Marking code

11

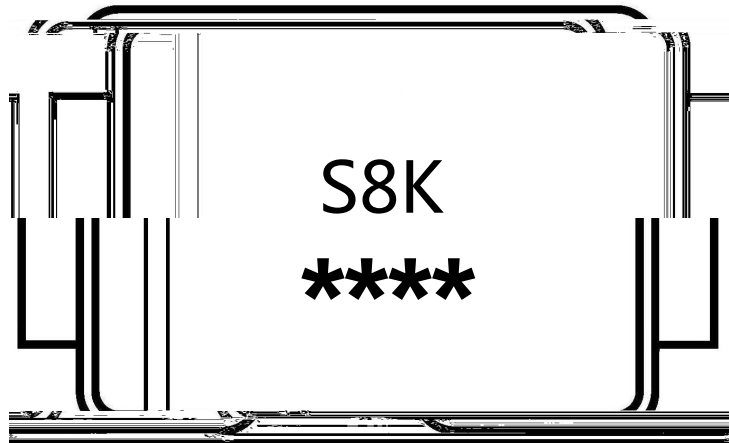

11

dddd" " ") d R d "

\ 4+ -"

6Cc " " >24D93+"SI , "84D "

```

dddd " " " " H4+" \4!"84D  S* ")1+"d"5  :;1-e 7"84D  S* "-:1+"R"d"5  :;1-?+= "H4+" \4"

```

84D

() / Temperature Profile for IR Reflow Soldering(Pb-Free)

)N()C(M(b(1 3f" " ")!>2 * :+?;B-)N(Z)C(°C0"S?5 -M(Zb(1 3!"

' UN±N N±(!N1 3f" " '!> :F"S 5 ,!-'UN±N°C0"Q92 :+?4;-N±(!N1 3!"

R ') (°C.1 3!" " " " R! 844+?;B"6, D-"Z) (°C.1 3!"

"

/ Resistance to Soldering Heat Test Conditions

/ Packaging SPEC.

/ Notices

11

/ Notices

11