

/ Descriptions

20~200V 3.0A


/ Features

/ Applications


/ Equivalent Circuit



/ Pinning




PIN	DESCRIPTION
1	Cathode
2	Anode

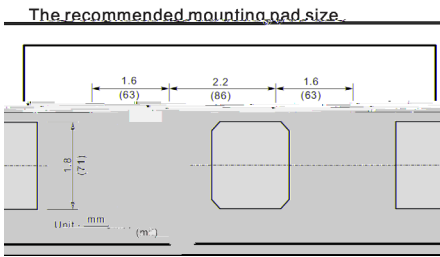


/ Marking

	θ										

/ Electrical Characteristic Curve

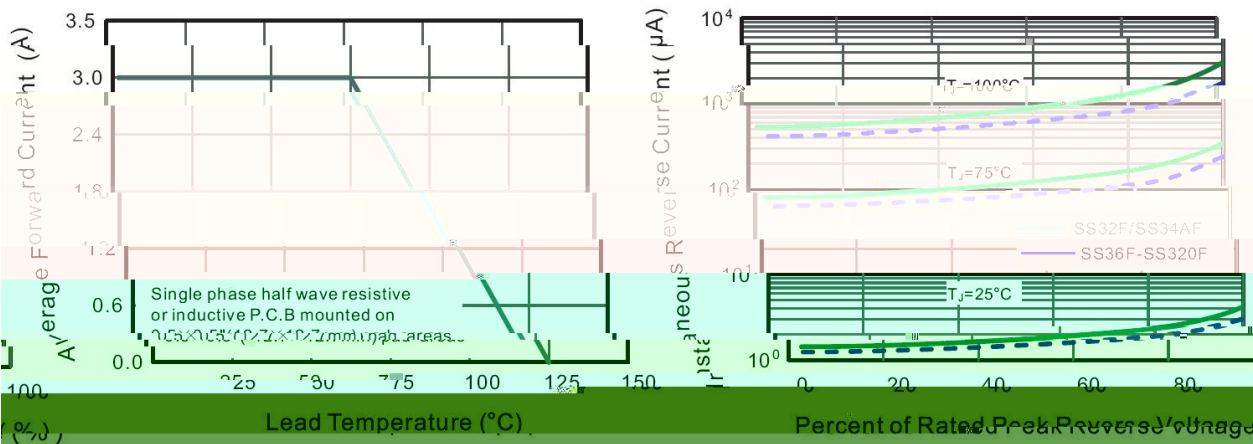

/ Package Dimensions

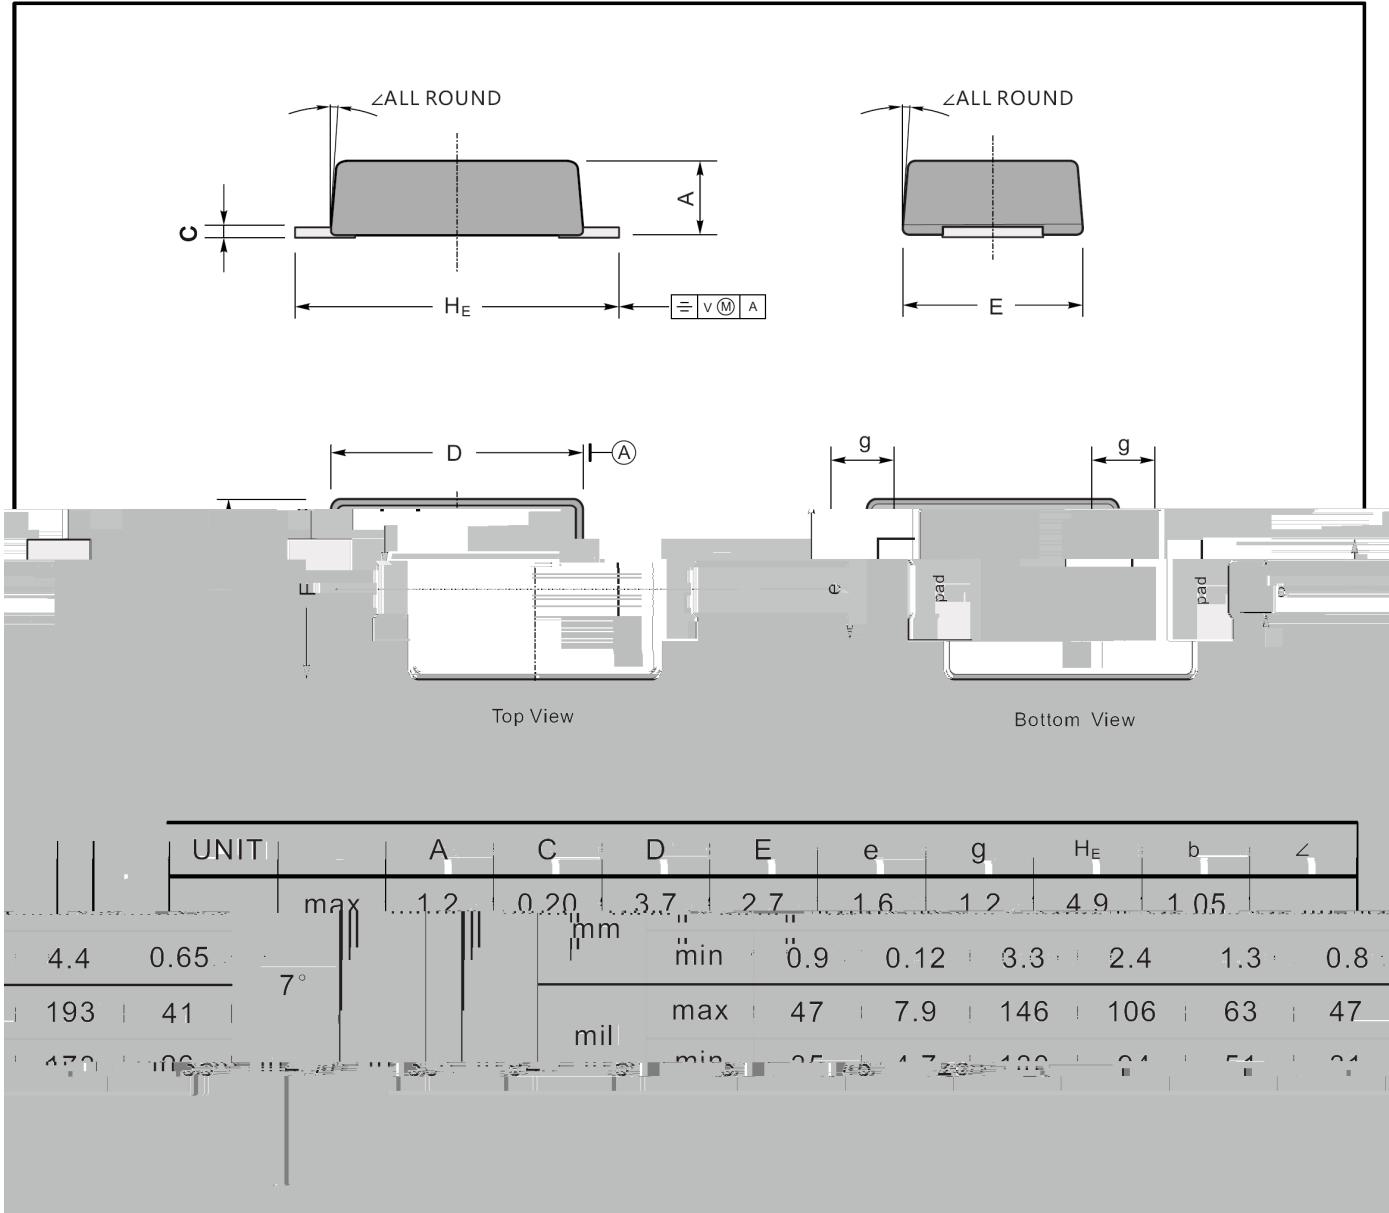


/ Marking Instructions

Marking


Type number	Marking code
SS32F	SS32
SS34F	SS34
SS34AF	SS34A
SS36F	SS36
SS38F	SS38
SS310F	SS310
SS312F	SS312
SS315F	SS315
SS320F	SS320

/ Marking Instructions

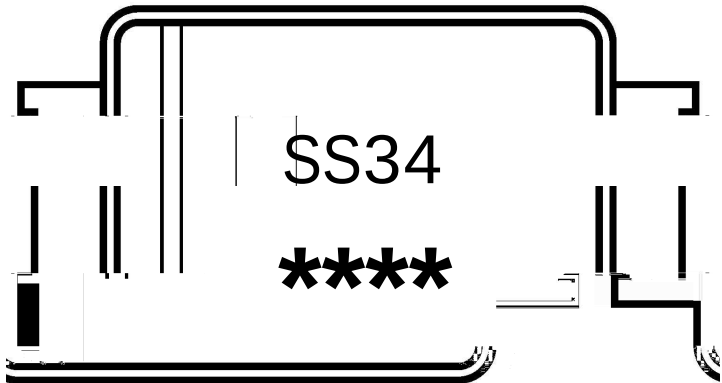

SS34			
*****	1	*	3 *
SS34			
*****	*		*

() / Temperature Profile for IR Reflow Soldering(Pb-Free)

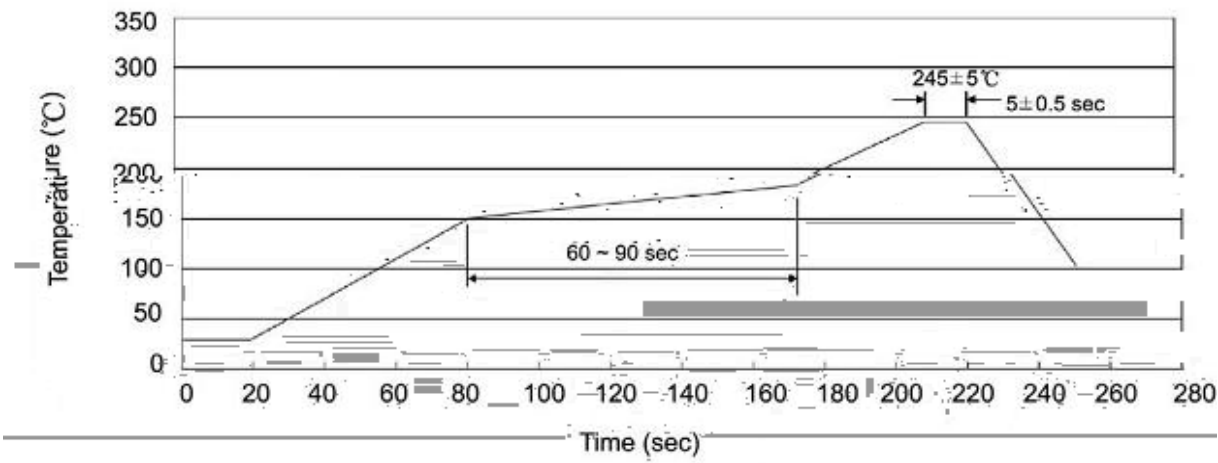

± ± ± ±

/ Resistance to Soldering Heat Test Conditions

± ± ± ±

/ Packaging SPEC.

封装形式	包装数量					包装尺寸		
	只 卷盘	卷盘 盒	只 盒	盒 箱	只 箱		盒	箱

/ Notices